



model 1119.14B

ADA Vandal-Resistant 14 Gauge Dual Drinking Fountain

FEATURES & BENEFITS

CONSTRUCTION

Unit is made of 14 gauge Type 304 stainless steel with a satin finish that resists stains and corrosion, and has soft, rounded corners. Unit features stainless steel satin finish back panel, vandal-resistant bottom plate, and 1-1/4" integral trap.

INTEGRATED TRAP

All cast brass 1-1/4" NPT adjustable traps completely concealed inside bottom plates for easy installation and lack of unwanted access.

BUBBLER HEADS

Polished chrome-plated brass bubbler heads with integral 11/16" dia. basin shank and stainless anti-rotation roll pin for vandal resistance strength. Shielded, angled stream opening provides a steady, sanitary source of drinking water at .45 gpm.

FOUNTAIN VALVES

The push-button activated valve offers the only all stainless steel valve body that is machined out of solid bar stock, is fully serviceable through the front of the push button assembly offering access to the water control cartridge and integral water supply strainer, and with front access to the water stream height adjustment for easy maintenance without having to remove the valve. Operating pressure range of 30 to 90 psi (2.1 to 6.2 bar).

VANDAL RESISTANT

The bubbler heads, push buttons, drain strainers and bottom plates are locked in place, discouraging unwanted vandal tampering.



SPECIFICATIONS

Model 1119.14B wall mounted ADA vandal-resistant drinking fountain shall include dual 14 gauge Type 304 Stainless Steel satin finish basins, 3/16" (.47 cm) thick steel in-wall mounting plate, vandal-resistant pushbutton operated stainless steel valves with front-accessible cartridge and flow adjustment, 100% lead-free waterways, polished chrome-plated brass vandal-resistant bubbler heads, polished chrome-plated brass vandal-resistant waste strainers, vandal-resistant bottom plates, stainless steel satin finish back panel, high and low fountain mounting levels, and 1-1/4" NPT traps. In extreme environments related to heat and cold, product(s) must be protected from damage/exposure due to these extreme conditions.

OPTIONS




- Water Filter: Model 6480 filter kit with 3000 gallon carbon block filter, filter head, and mounting bracket.
- Bottle Filler: Model 1920, bottle filler can be a stand-alone station, or mounted above Haws 1001, 1011, 1107L, 1109, 1117L, and 1119 series drinking fountain models.
- Remote Drinking Fountain Water chiller: Model HCR8, 8 gph (30.3 L) remote water chiller provides instantaneous cooling to meet a continuous demand for chilled water.
- Support Frame: Model 6800 In-wall floor mounted fixture support legs, welded steel 4-bolt floor flanges, and supplied with 'U' bolts and hardware.

For more information, visit www.hawsco.com or call (888) 640-4297.

APPLICATIONS


Perfect for either public or private indoor/outdoor settings, Model 1119.14B is a great fit in areas where aesthetics are important to the overall appeal of the architecture. This series is precisely mounted, making it a nice addition to any surrounding. Beautiful satin finish helps to maintain the fountains overall appeal so it always remains looking as new as it did when it was installed. Specifically, this type of wall mounted drinking fountain may be placed in settings such as: schools and other locations in and around office buildings where the temperature remains above freezing. Model meets all current Federal Regulations for the disabled including those in the Americans with Disabilities Act. Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61-Section 9, NSF/ANSI/CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and 116876 (AB 100) "NSF/ANSI/CAN 61: Q ≤ 1".

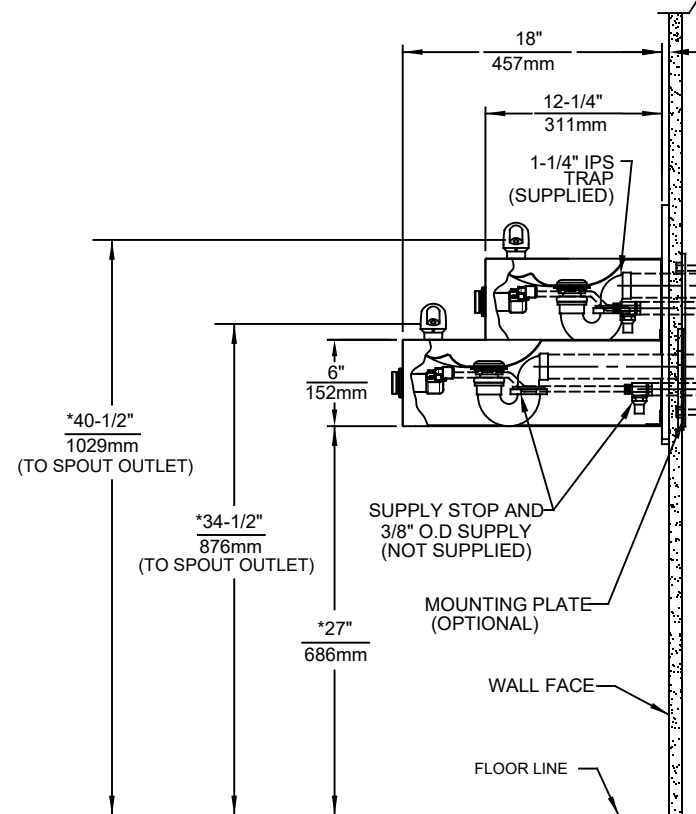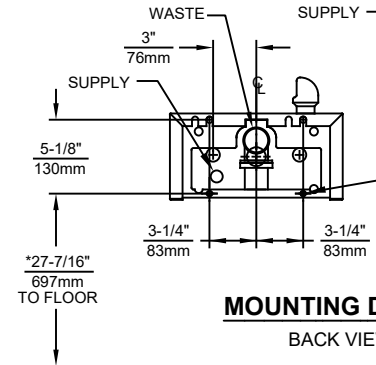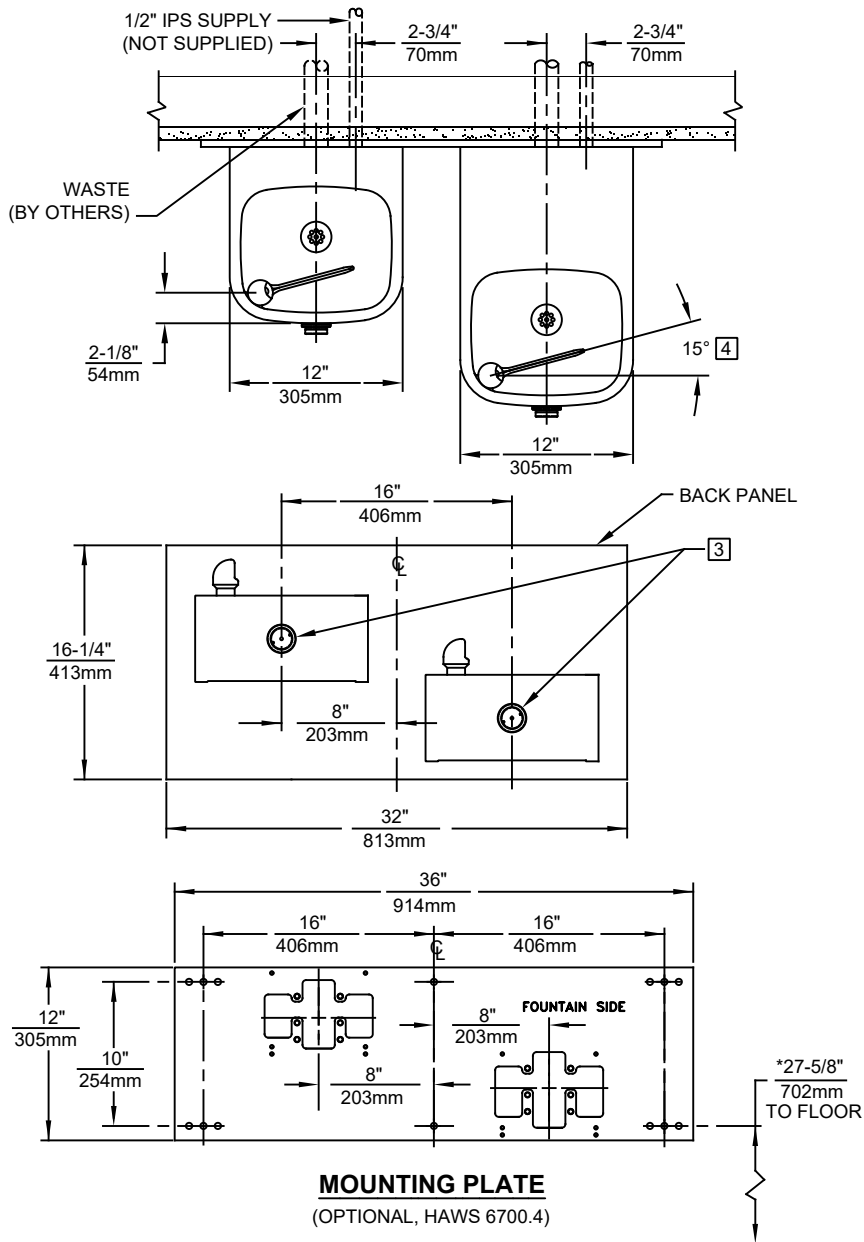



**NOTES:**

1. HOLD ROUGH-IN DIMENSIONS $\pm 1/4"$ (6.4mm).
2. WHEN INSTALLING THIS UNIT LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO. FOR INSTALLATION HEIGHTS OTHER THAN SHOWN, DIMENSIONS MARKED (*) MUST BE ADJUSTED ACCORDINGLY.
- [3] REFER TO 5874 SERIES OPERATION AND MAINTENANCE MANUAL FOR PUSH BUTTON AND VALVE INSTALLATION/MAINTENANCE INSTRUCTIONS.
- [4] MAXIMUM ADJUSTABLE RANGE IS 15° FROM PARALLEL TO BACK OF WALL.

		Haws	
ECN NO.	REVISED PER	BY:	MODEL(S)
	ECN: 5741	FV	
DRAWN:	DATE:	CHK'D:	
F.VASQUEZ	04/01/04	BJM	
APPROVED:	DATE:		
FV	11/12/21		
SCALE: 1:14		DRAWING TYPE:	

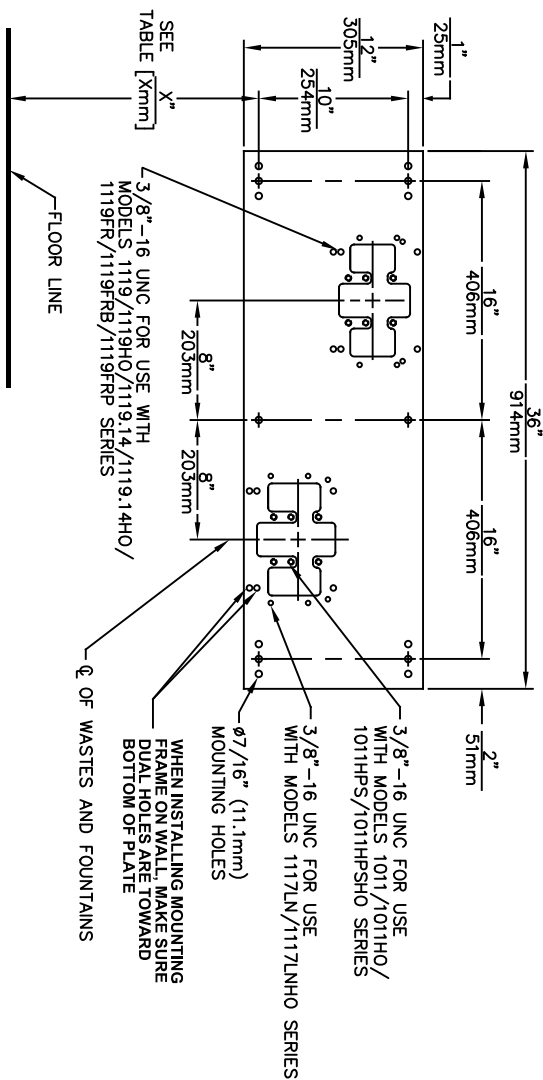

MODEL		MODEL
DIMENSION	1011/HO/HPS	1117/HO
"X"	25-1/2" [648mm]	27" [686mm]
LOWER SUPPLY	28-3/4" [730mm]	29-1/2" [749mm]
LOWER WASTE	27-7/8" [706mm]	29-1/4" [743mm]
UPPER SUPPLY	33-3/4" [857mm]	35-1/2" [902mm]
UPPER WASTE	32-7/8" [835mm]	35-1/4" [895mm]
MODEL		
DIMENSION	1119/HO	1119, 14/HO
"X"	27-5/8" [702mm]	27-5/8" [702mm]
LOWER SUPPLY	29-5/8" [752mm]	29-5/8" [752mm]
LOWER WASTE	30-3/4" [781mm]	30-3/4" [781mm]
UPPER SUPPLY	35-3/8" [905mm]	35-3/8" [905mm]
UPPER WASTE	36-1/2" [927mm]	36-1/2" [927mm]
MODEL		
DIMENSION	1119FR	
"X"	27-5/8" [702mm]	
SUPPLY	SEE FREEZE	
WASTE	VALVE ROUGH-IN	

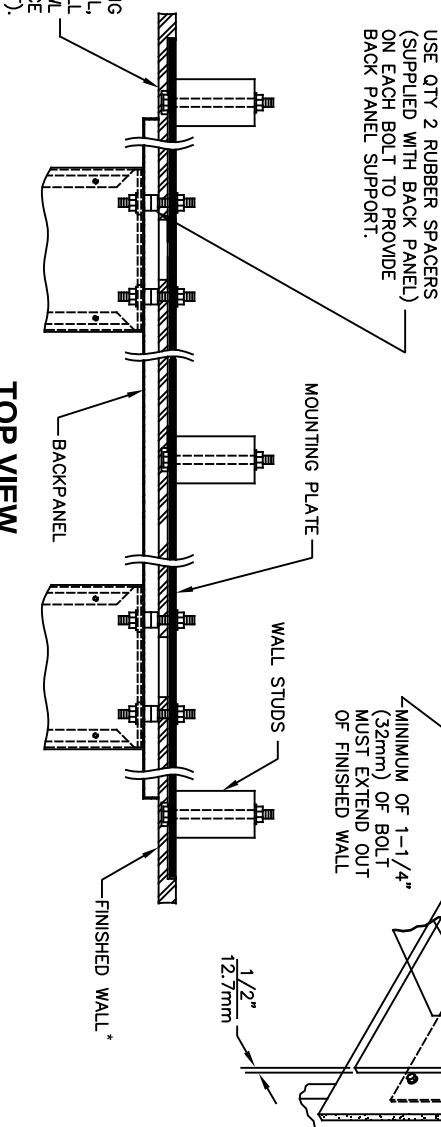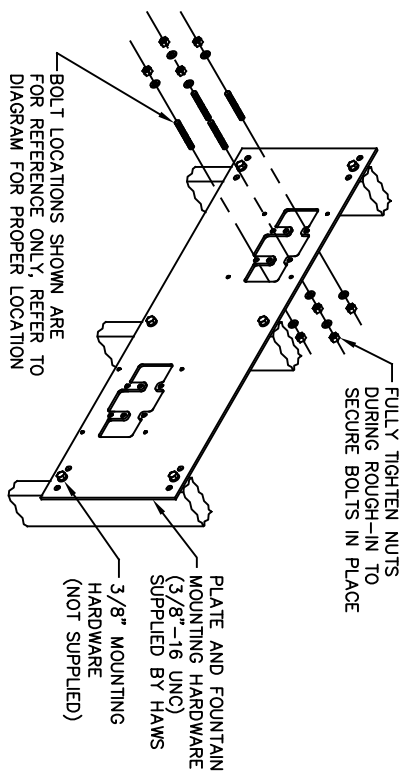

CAUTION

REGARDING CONCRETE/MASONRY WALL MOUNTING: DO NOT SECURE MOUNTING PLATE TO SAME SIDE OF WALL AS FOUNTAIN. AVOID COMPROMISING INTEGRITY OF WALL WHEN ANCHORING FOUNTAIN. IT IS RECOMMENDED THAT INSTALLER CALL TECHNICAL SUPPORT IF THERE ARE ANY QUESTIONS AS TO HOW TO OBTAIN A PROPER ANCHOR IN CONCRETE/MASONRY WALLS. 1-800-766-5612

ECN NO. REVISED PER BY: _____		MODEL(S)	
DRAWN: _____	DATE: _____	JG	67/00.4
C/L _____	CHK'D: _____	JG	
APPROVED: _____	DATE: _____		
FV _____	02/11/25		
SCALE: N/A	DRAWING TYPE:	INSTALLATION	
SIZE: A	SHEET 1 OF 1	REVISION	20



model 1920

Vandal Resistant Wall-Mount Bottle Filler

FEATURES & BENEFITS

BOTTLE FILLER VALVE

With its patented stainless steel, push-button activated valve assembly which allows for front access stream adjustment as well as cartridge and strainer access, this bottle filler offers 100% lead free waterways. The valve works at an operating pressure range of 30 to 90 psi (2.1 to 6.2 bar).

CONSTRUCTION

Unit is made of 14 gauge Type 304 stainless steel with a satin finish that resists stains and corrosion, and has soft rounded corners. Unit features vandal-resistant bottom plate and dispensing nozzle.

VANDAL-RESISTANT

The push button and bottom plate are locked in place, discouraging unwanted vandal tampering.

LAMINAR FLOW

Adjustable, splash-free, 1 gpm (3.78 L) laminar water flow.

EFFICIENT AND FLEXIBLE INSTALLATION

Unit is designed for retrofit or new construction applications. No drain required for mounting over existing drinking fountain.

MOUNTING OPTIONS

Comes with an in-wall 3/16" thick steel mounting plate and select from back panel models to complete installation. Unit can mount on various wall types.



SPECIFICATIONS

Model 1920 wall mounted vandal-resistant bottle filler shall include 100% lead-free waterways, satin stainless steel construction, 1 gpm (3.78 L) laminar flow, push-button operated stainless steel valve with front-accessible cartridge and flow adjustment. It can be used as a stand-alone station or mounted above the Haws® 1001, 1011, 1107L, 1109, 1117L, and 1119 series drinking fountains. In extreme environments related to heat and cold, product(s) must be protected from damage/exposure due to these extreme conditions.

This product requires a mounting plate; either the 6700 in-wall or the 6700R on-wall support plate. (See options below)

APPLICATIONS

Great for business and municipality settings, indoors and out, this bottle filler can be placed virtually anywhere. It also compliments drinking fountains already in use.

Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61-Section 9, NSF/ANSI/CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and 116876 (AB 100) "NSF/ANSI/CAN 61: Q ≤ 1".



OPTIONS

- Water Filter: Model 6480 filter kit with 3000 gallon carbon block filter, filter head, and mounting bracket.
- Mounting Plate: Model 6700, in-wall mounting plate for model 1920.
- Mounting Plate: Model 6700R on-wall mounting plate for model 1920.
- Back Panel: Model BP15, satin finish stainless steel 15 inch back panel for Model 1920 over a single fountain.
- Back Panel: Model BP32, satin finish stainless steel 32" back panel for model 1920 bottle filler over a dual fountain.
- Drain Basin: Model 6468 drip tray accessory catches unused bottle filler water.

For more information, visit www.hawsco.com or call (888) 640-4297.

1920 INDEX

INSTALLATION WITH:	TYPICAL USES	SEE SHEET...
1001/1011 BOWLS	HAWS SERIES 1001, H1001.8X, 1011, 1011.8X STYLE FOUNTAINS	3 OF 9
1109/1119 BOWLS		4 OF 9
1107/1117 BOWLS		5 OF 9
1311/1501 BOWLS		6 OF 9
1047		7 OF 9
6468		8 OF 9
CHILD HEIGHT	HAWS 1107P STD CONFIG CHILD HEIGHT, 1109P STD CONFIG CHILD HEIGHT, 1311P STD CONFIG CHILD HEIGHT	9 OF 9



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSCO.COM
WEBSITE: WWW.HAWSCO.COM



ECN NO. REVISED PER BY: J.G.
DRAWN BY: DATE: CHK'D: J.G.
APPROVED: DATE: 11/2/24

MODEL(S)
1920/1920HPS/1920W



PART NUMBER
0510000490.D
REVISION
13

SCALE: N/A DRAWING TYPE: INSTALLATION SIZE: A SHEET 1 OF 9

THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS
KE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE

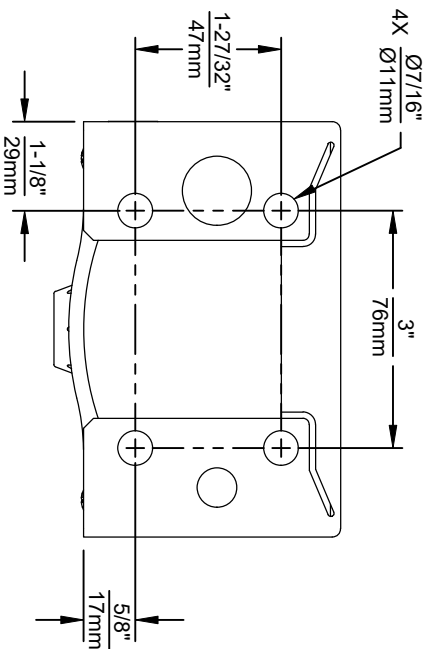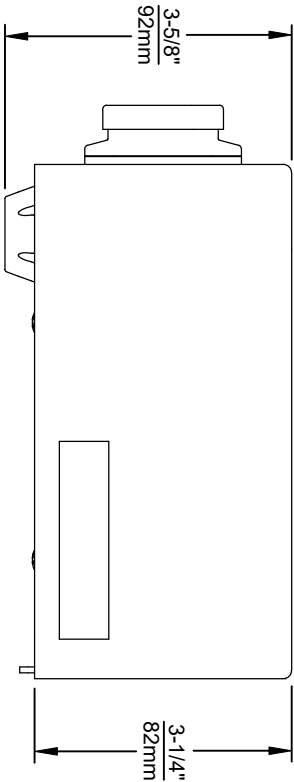

1920 SERIES MOUNTING HOLE LOCATIONS
(3/8"-16 UNC MOUNTING HARDWARE NOT SUPPLIED)

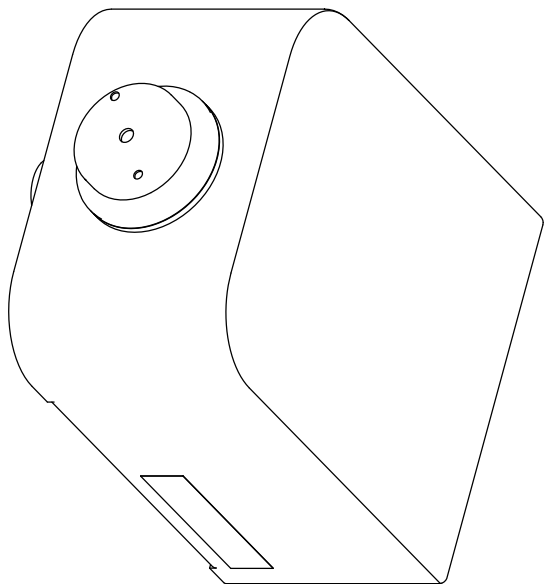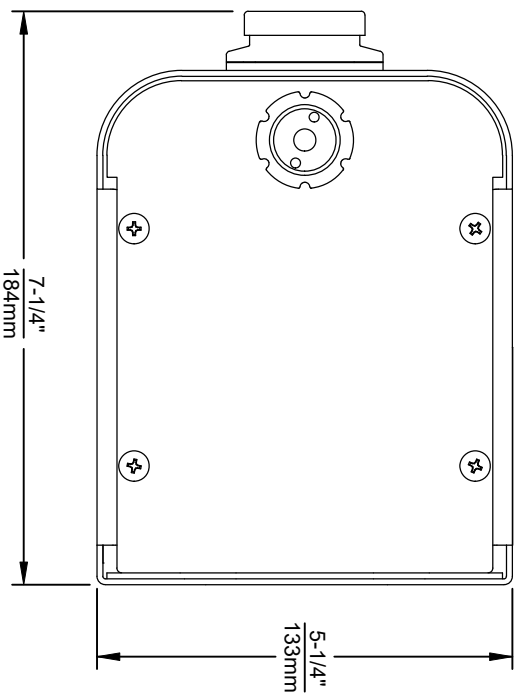

NOTES:

1. SEE SHEETS 2 THRU 7 FOR BOTTLE FILLER ADULT ADA HEIGHT APPLICATIONS AND SHEET 8 FOR CHILD ADA HEIGHT APPLICATIONS.
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.



Haws
Since 1906


1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

EON NO. REVISED PER BY:		MODEL(S)	
5041	EON 6131 J.G.	1920/1920HPS/1920W	
DRAWN	DATE	CHKD	
1855/6	J.G.		
APPROVED:	DATE	SCALE:	N/A
RH	11/29/24	DRAWING TYPE:	INSTALLATION
SIZE:		A	SHEET 2 OF 9


PART NUMBER
0510000490.D

REVISION
13

THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS
KE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE

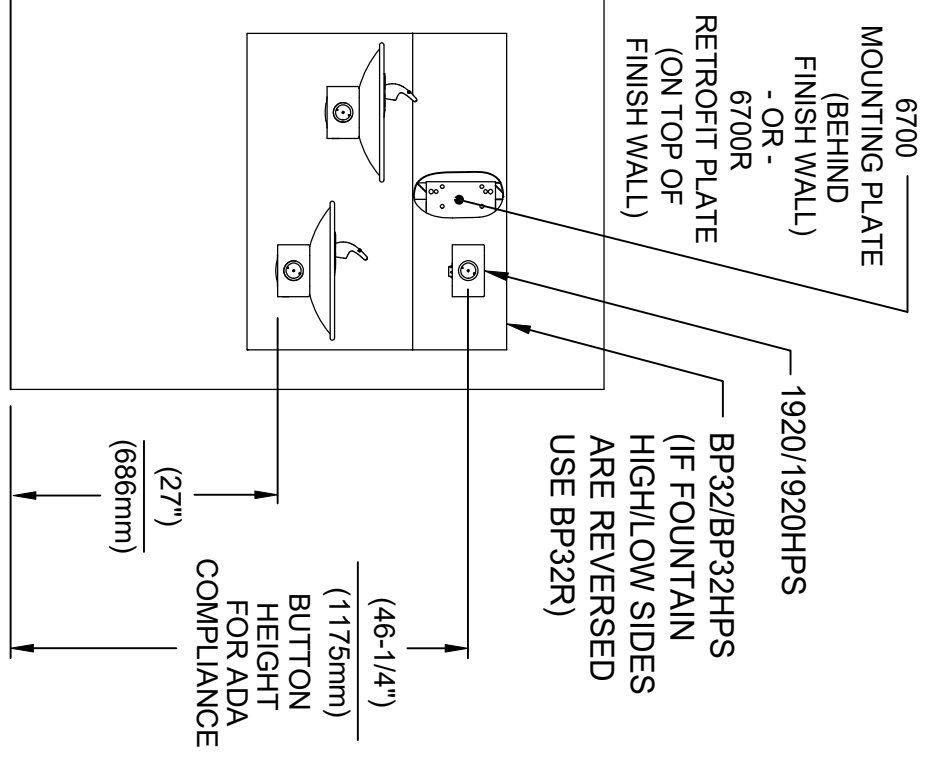

INSTALLATION ABOVE HAWS 1011 & H1011.8 SERIES

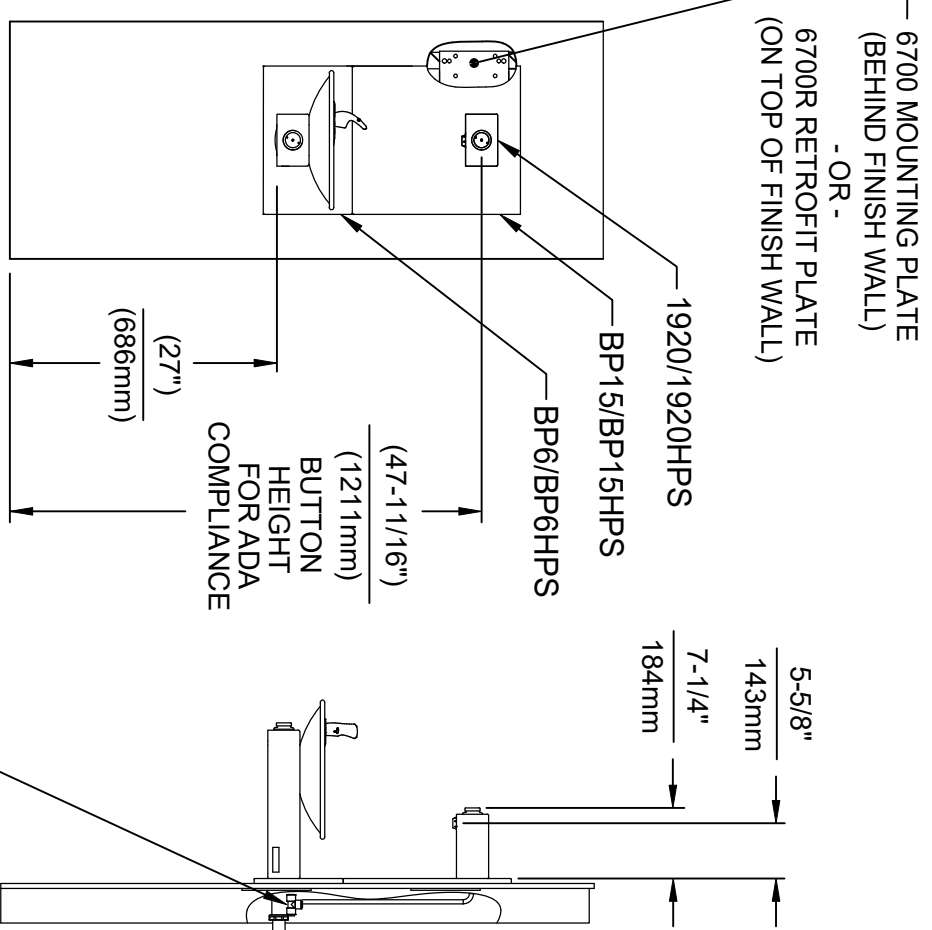


INSTALLATION ABOVE HAWS 1001 & H1001.8 SERIES

* IF YOUR FOUNTAIN IS THIS STYLE USE
THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS
FOR MOUNTING PLATES AND BACK PANELS
(SHOWN FOR REFERENCE - NOT SUPPLIED).

2. WHEN INSTALLING THIS UNIT, LOCAL,
STATE OR FEDERAL CODES SHOULD
BE ADHERED TO FOR INSTALLATION
LOCATIONS, WASTE & SUPPLY
REQUIREMENTS OTHER THAN SHOWN.

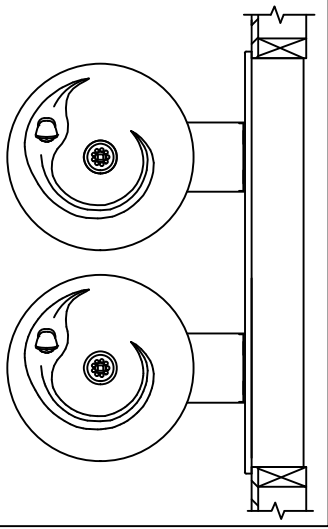

3/8" O.D. SUPPLY
TUBING AND 3/8" O.D.
PUSH-IN TEE SUPPLIED.
(CONNECT TO FOUNTAIN
SUPPLY LINE)




Haws®
Since 1906

ECON. NO. REVISED PER BY		MODEL(S)	
5081	ECON. 6131	J.G.	
DRAWN	DATE	CHKD	
M	08/05/17	J.G.	
APPROVED	DATE		
RH	11/26/24		
SCALE: N/A		DRAWING TYPE: INSTALLATION	SIZE: A
			SHEET 3 OF 9
		PART NUMBER	0510000490.D
		REVISION	13

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS
KE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE

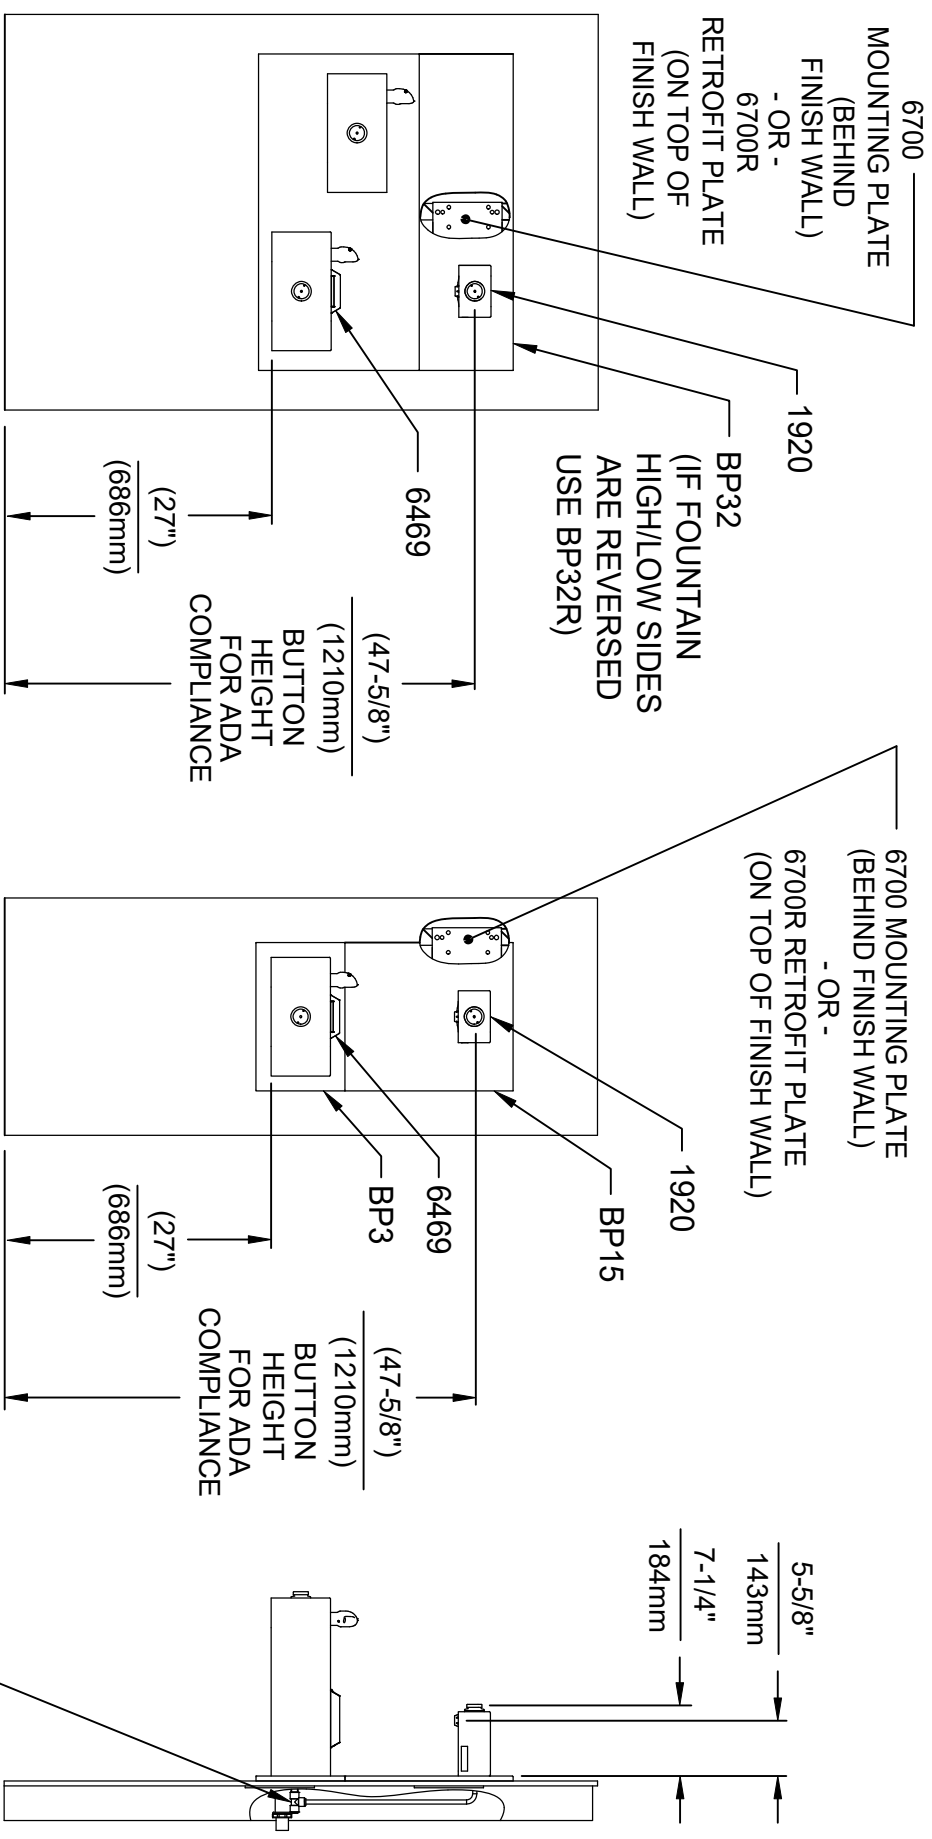


INSTALLATION ABOVE HAWS 1119 & H1119.8 SERIES

**INSTALLATION ABOVE HAWS 1109 & H1109.8 SERIES
SEE SHEET 8 FOR INSTALLATION AT CHILD HEIGHT**

* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).

2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.






Haws
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO.	REVISED PER	BY	MODEL(S)
5041	ECN 6131	JG	
DRAWN	DATE	CHKD	
11/15/17	01/05/17	JG	
APPROVED	DATE		
RH	11/29/24		
SCALE	N/A	DRAWING TYPE	INSTALLATION
SIZE	A	SHEET	4 OF 9

PART NUMBER
0510000490.D
REVISION
13


1920/1920HPS/1920W

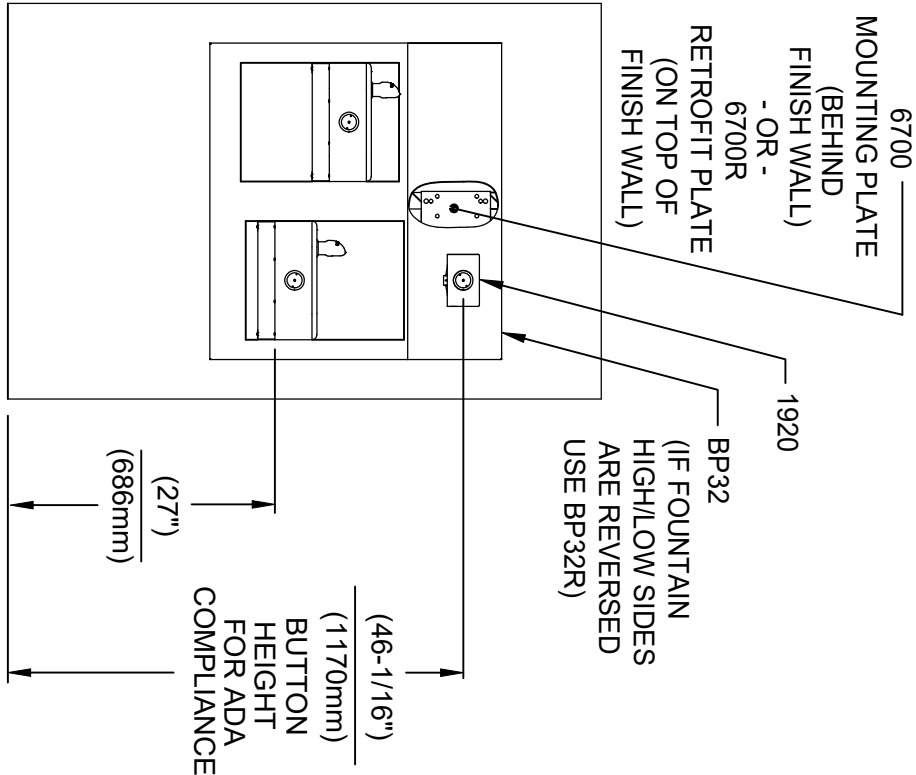

INSTALLATION ABOVE HAWS 1117L & H1117.8 SERIES



* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

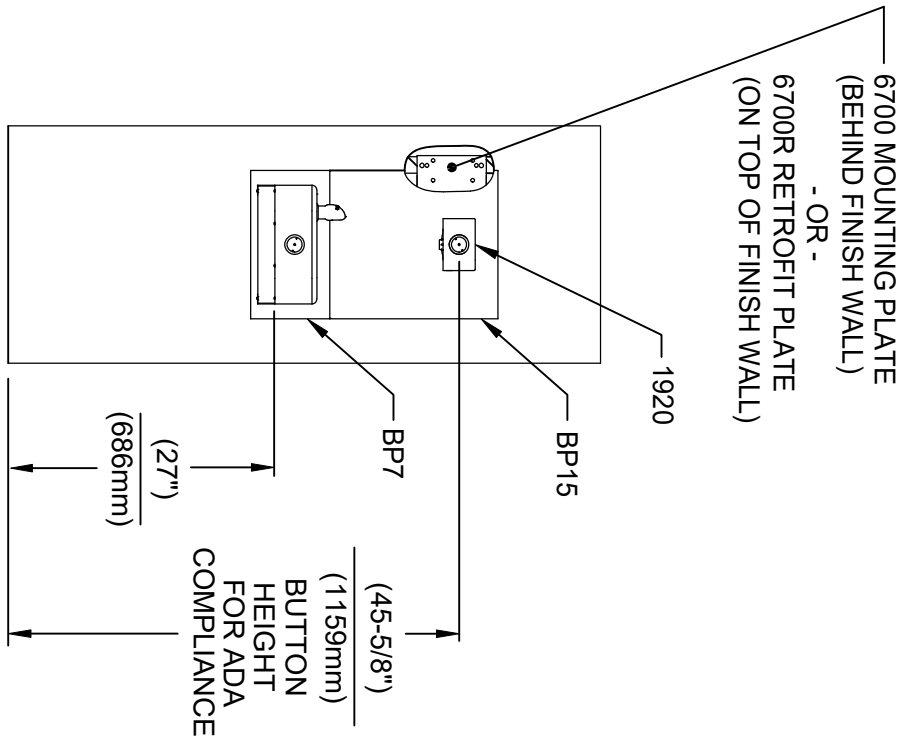

**INSTALLATION ABOVE HAWS 1107L & H1107.8 SERIES
SEE SHEET 8 FOR INSTALLATION AT CHILD HEIGHT**

3/8" O.D. SUPPLY TUBING AND 3/8" O.D. PUSH-IN TEE SUPPLIED. (CONNECT TO FOUNTAIN SUPPLY LINE)

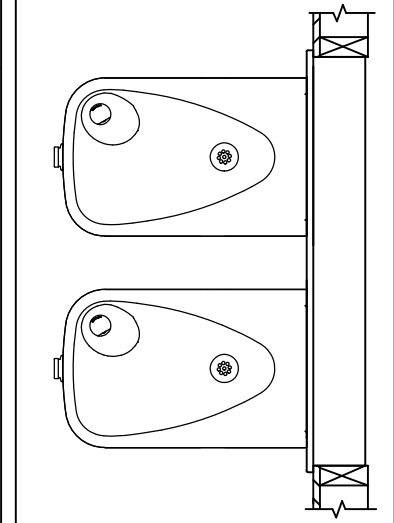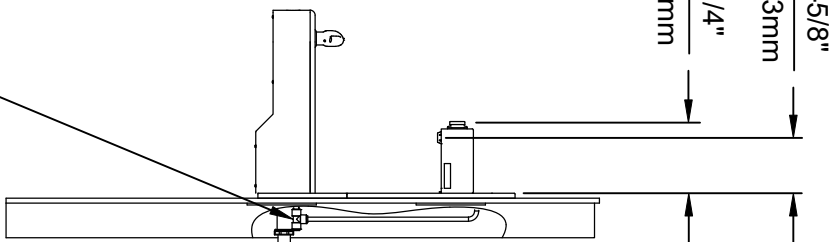


ECONO REVISED PER BY		MODEL(S)		PART NUMBER	
5081	J.G.	1920/1920HPS/1920W		0510000490.D	
DATE: 09/07	CHG: J.G.			REVISION	13
APPROVED: RH	DATE: 11/29/24	SCALE: N/A	DRAWING TYPE: INSTALLATION	SIZE: A	SHEET 5 OF 9



Haws
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

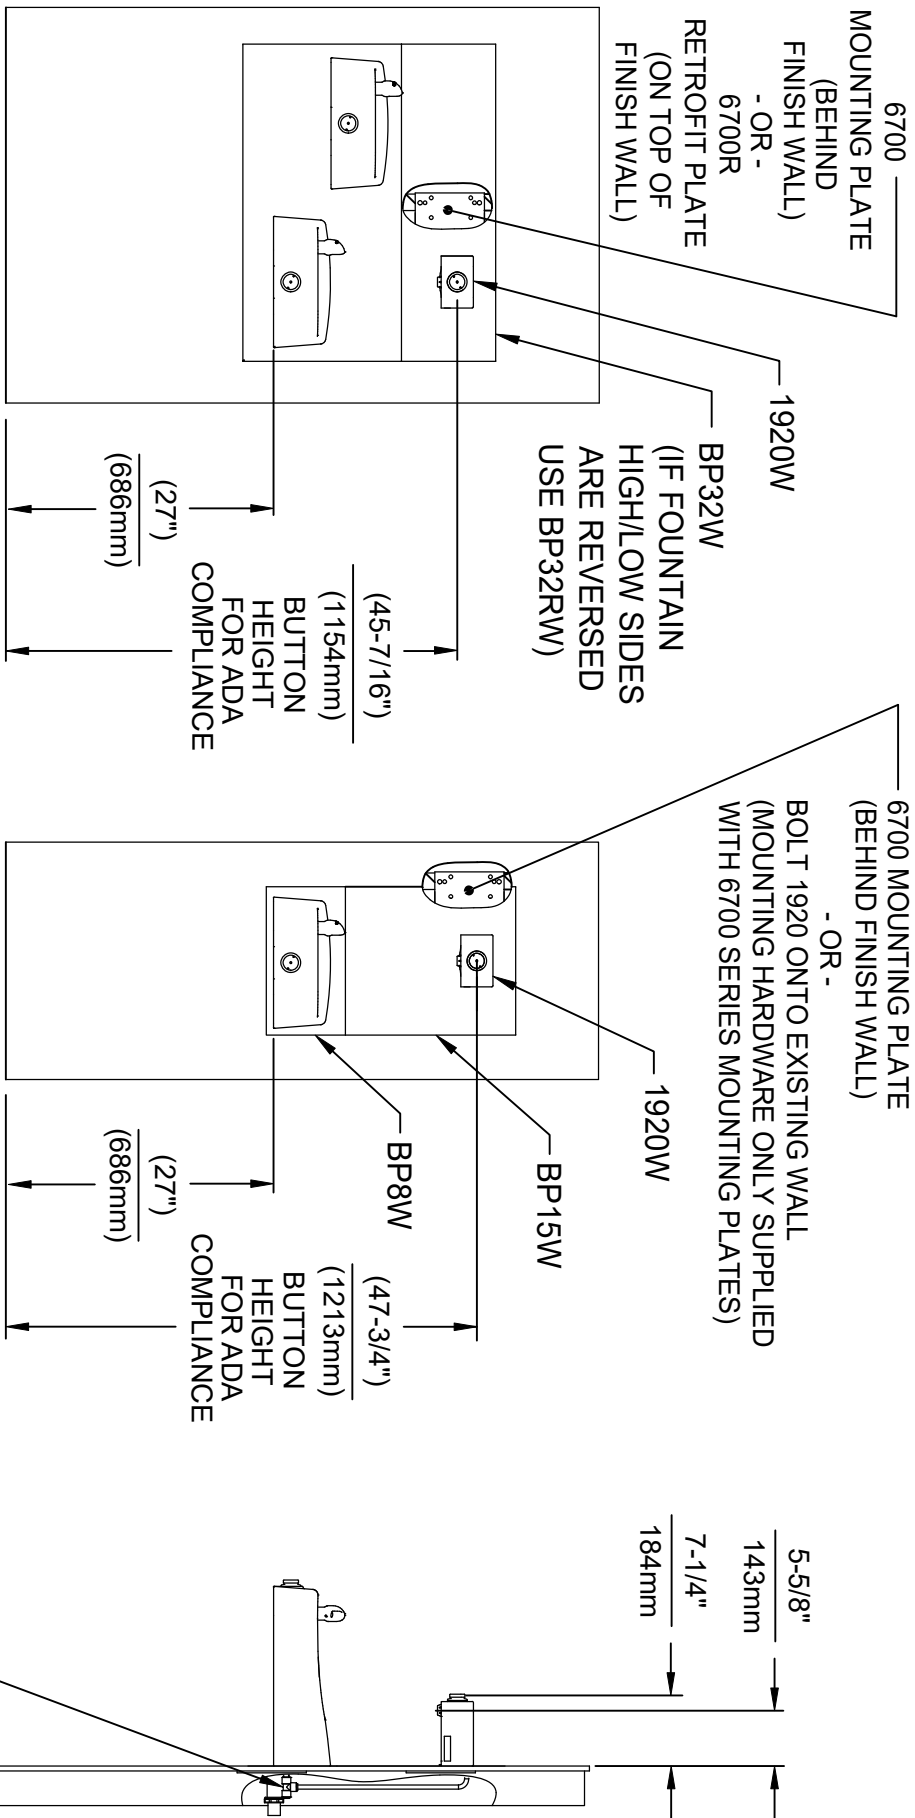


INSTALLATION ABOVE HAWS 1501

INSTALLATION ABOVE HAWS 1311
SEE SHEET 8 FOR INSTALLATION AT CHILD HEIGHT

* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

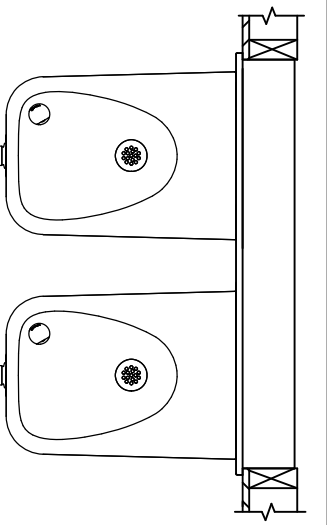




Haws
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO.	REVISED PER BY	MODEL(S)	PART NUMBER
5081	ECN 6131 J.G.	1920/1920HPS/1920W	0510000490.D
DRAWN	DATE	CHKD	REVISION
W	02/25/17	J.G.	13
APPROVED:	DATE	SCALE	SIZE
RH	11/29/24	N/A	A
DRAWING TYPE		INSTALLATION	SHEET 6 OF 9

THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS
KE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.




6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
BOLT 1920 ONTO EXISTING WALL
(MOUNTING HARDWARE ONLY SUPPLIED
WITH 6700 SERIES MOUNTING PLATES)

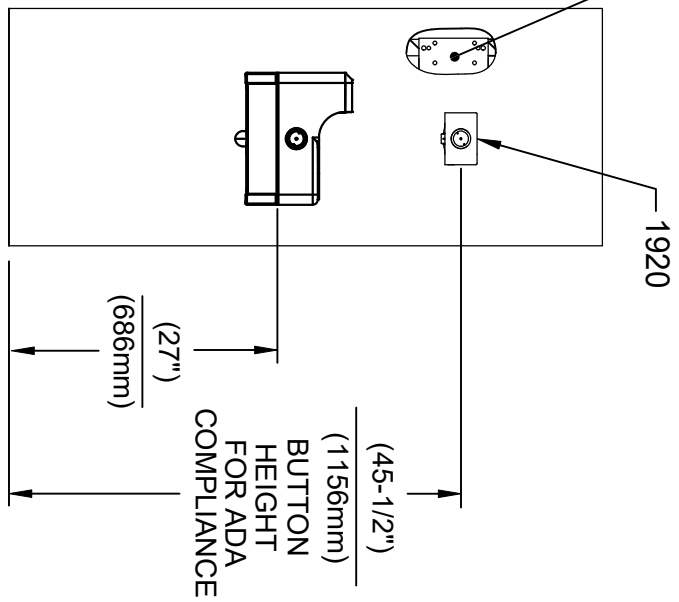

INSTALLATION ABOVE HAWS 1047

* IF YOUR FOUNTAIN IS THIS STYLE USE
THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS
FOR MOUNTING PLATES AND BACK PANELS
(SHOWN FOR REFERENCE - NOT SUPPLIED).
2. WHEN INSTALLING THIS UNIT, LOCAL,
STATE OR FEDERAL CODES SHOULD
BE ADHERED TO FOR INSTALLATION
LOCATIONS, WASTE & SUPPLY
REQUIREMENTS OTHER THAN SHOWN.

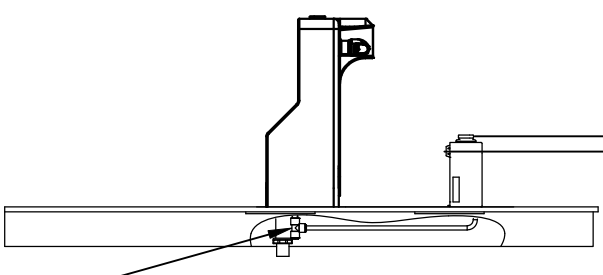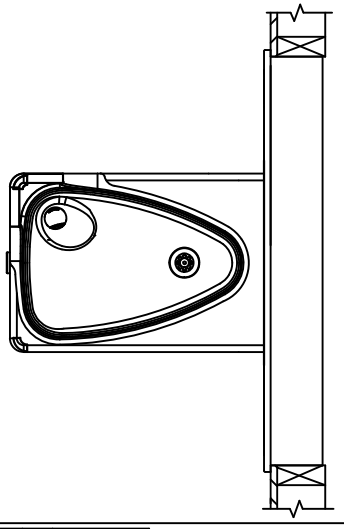

3/8" O.D. SUPPLY
TUBING AND 3/8" O.D.
PUSH-IN TEE SUPPLIED.
(CONNECT TO FOUNTAIN
SUPPLY LINE)



Haws
Since 1906


1455 KLEPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN NO.	REVISED PER BY	MODEL(S)	PART NUMBER
5220	ECN 6131 J.G.	1920/1920HPS/1920W	0510000490.D
DRAWN BY	DATE	CHG	REVISION
RH	11/29/24	J.G.	13
APPROVED	DATE	SCALE	SIZE
		N/A	A
		DRAWING TYPE	SHEET
		INSTALLATION	7 OF 9

THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS
KE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE


6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATE
(ON TOP OF FINISH WALL)

* MODELS 1920 (BOTTLE FILLER),
BP15, BP6 (BACK PANELS) AND
6468 (WASTE DRIP TRAY) ARE
ALL AVAILABLE TOGETHER AS
MODEL 1922.

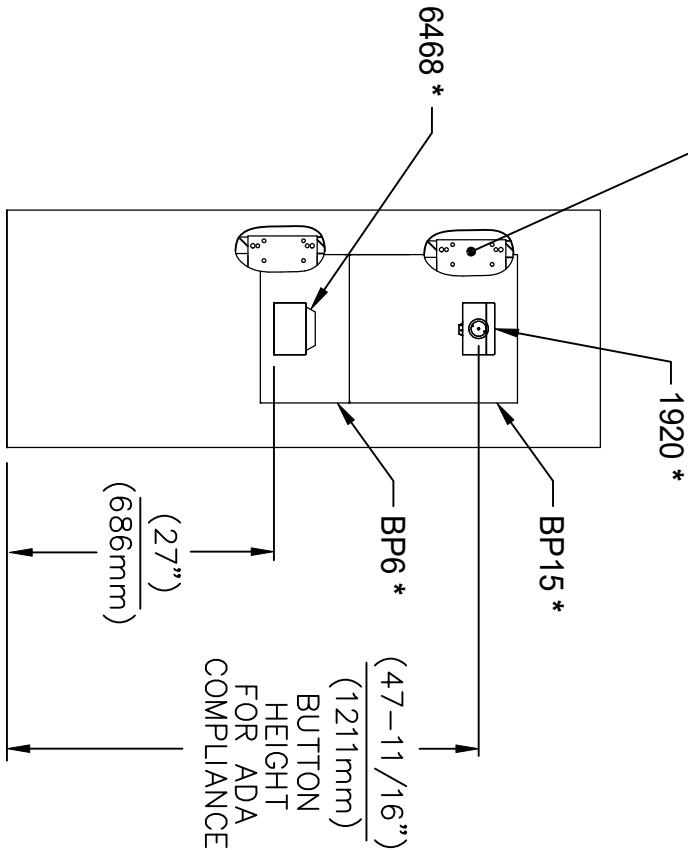

INSTALLATION ABOVE 6468

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATE, WASTE DRIP TRAY AND BACK PANELS (SHOWN FOR REFERENCE - NOT SUPPLIED).
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

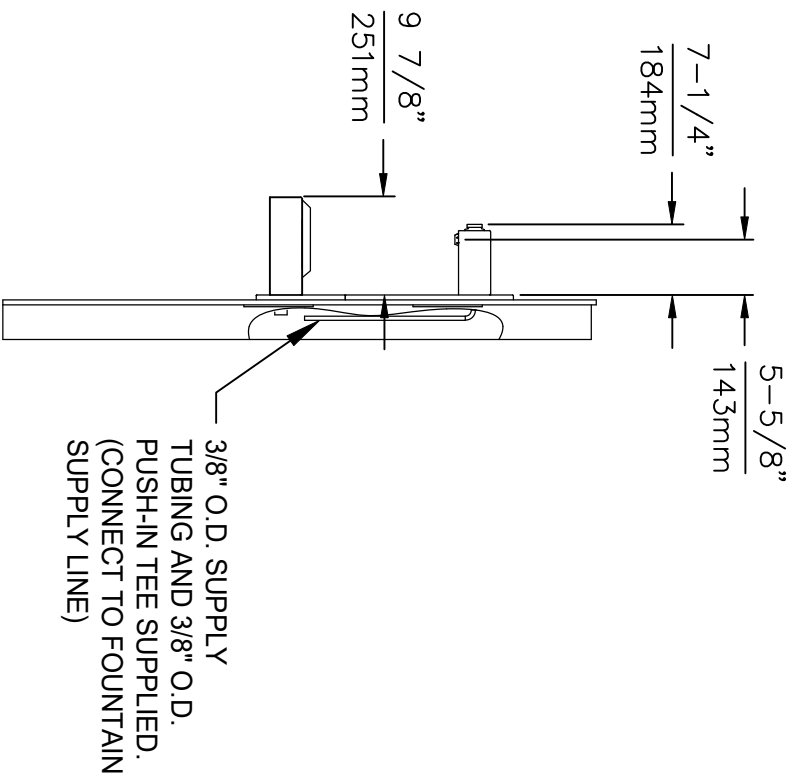


**Haws®**
Since 1906

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

EQ. NO.	REVISED PER BY	MODEL(S)	PART NUMBER
5807	EQ. 6131	J.G.	0510000490.D
DRWD	DATE	CHKD	REVISION
10/20	10/20	J.G.	13
APPROVED:	DATE	SCALE:	SIZE:
RH	11/29/24	N/A	A
DRAWING TYPE:		SHEET 8 OF 9	
INSTALLATION:			

131P CONFIG STD CHILD HEIGHT

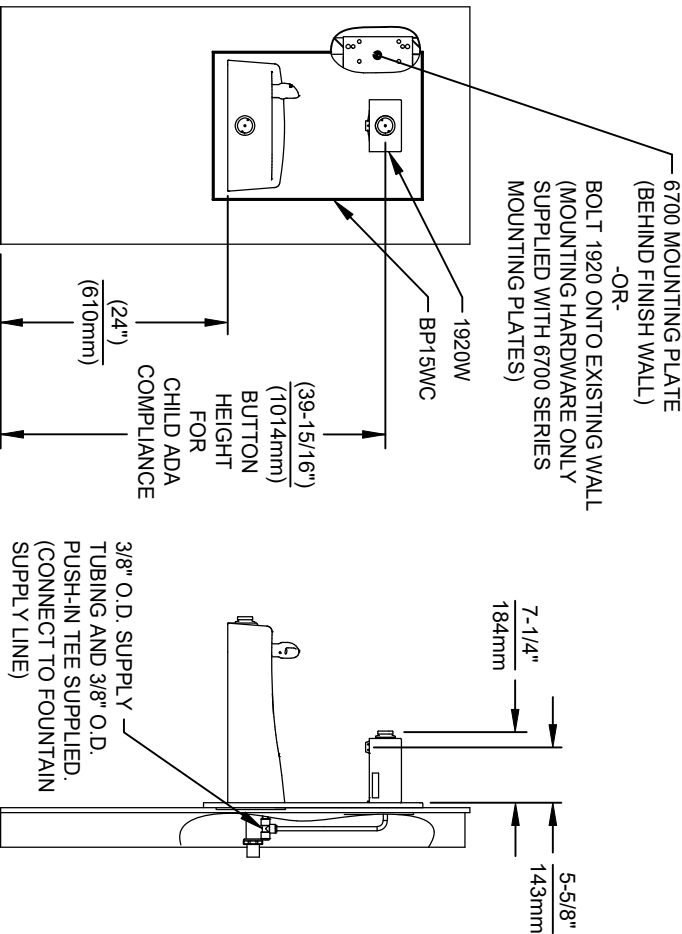

1109P CONFIG STD CHILD HEIGHT



INSTALLATION FOR 1311P CONFIG STD CHILD HEIGHT

- NOTES:
1. HEIGHT DIMENSIONS SHOWN ARE FOR CHILD ADA APPLICATIONS:
 - BOTTLE FILLER HEIGHT AT 40" MAX.
 - DRINKING FOUNTAIN BUBBLER HEIGHT AT 30" MAX.(SEE SHEETS 3, 4 & 5 FOR ADULT ADA HEIGHT DIMENSIONS)
 2. SEE SEPARATE 6700 DRAWINGS FOR MOUNTING PLATES AND BACK PANELS (SHOWN FOR REFERENCE - SOLD SEPERATELY OR PART OF A BUNDLED PRODUCT).
 3. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.



ECN NO	REVISED PER BY	PART NUMBER
5607	JG	0510000490.D
DRAWN:	DATE:	REVISION
FV	01/26/24	13
APPROVED:	DATE:	
RH	11/26/24	
SCALE:	NA	
DRAWING TYPE:	INSTALLATION	
SIZE:	A	
SHEET #	OF #	
9	9	

FEATURES & BENEFITS

MOUNTING

Coated steel carrier with mounting feet and heavy duty zinc-plated U-bolts. Provides the maximum mounting strength for many Haws wall mounted products, including drinking fountains.

ADAPTABILITY

Includes mounting holes for plumbing stub out bracket and electrical boxes. Optional 6810W waste line insert allows for lateral waste line to fit within 2x4 wall.

OPTIONS

- Drain Line Insert: Model 6810W for allowing a lateral waste line to pass through a carrier upright.
- Mounting Plate: Model 6700 for most Haws single bubbler fountains and 1920-series bottle fillers.
- Mounting Plate: Model 6700.4 "Hi-Lo" for most Haws dual bubbler fountains.
- Mounting Plate: Model 6715 "Hi-Lo" for Haws fountain model 1501.
- Mounting Plate: Model 6717 for 1107 and 1117 series fountains.
- Mounting Plate: Model 6776 for 766X-series eyewash hand sinks.

For more information, visit www.hawsco.com or call (888) 640-4297.



SPECIFICATIONS

Model 6800 In-wall floor mounted fixture carrier: Two 2½" x 1½" x 1/8" thick structural steel uprights having 6" x 3" x 3/8" thick welded steel 4-bolt floor flanges, supplied with 'U' bolts and hardware. For use in conjunction with Haws in-wall mounting plates 6700, 6700.4, 6710, 6715, 6717, or 6776, for extra heavy duty fixture support. Fits inside standard 2" x 4" wall construction. Suitable for use with either 3/8" or 1/2" concrete anchors (by others). Includes mounting holes for plumbing stub out bracket and electrical boxes. Exceeds requirements when tested in accordance to ASME Standard A112.6.1M. Design was independently verified as suitable to meet HCAI and CBC anchor spacing requirements.

APPLICATIONS


Haws produces this mounting frame to assist in the installation process as well as to provide a solid base for the wall mounted designed fixtures. Mounting plates and frames meet the requirements solely for the specified applicable fountains and are not designed to be used in the installation of any unspecified fountain.

THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

NOTES:



1. THE 6800 SUPPORT CARRIER CAN ALSO BE USED WITH MOUNTING PLATE MODELS 6705, 6710, 6715, 6717, AND 6776.
2. CONCRETE ANCHORS NOT SUPPLIED. 3/8" ANCHORS ARE RECOMMENDED AND SHOULD BE USED WITH SUPPLIED 3/8" STRUCTURAL WASHERS. 1/2" ANCHORS ARE ALSO ACCEPTABLE. ANCHORS SHALL BE PROPERLY SELECTED FOR THE APPLICATION AND SHALL HAVE A MINIMUM 1,200 LBF PULL OUT/AXIAL LOAD CAPACITY EACH.
3. HOLD ROUGH-IN DIMENSIONS $\pm 1/4"$ (6.4mm).
4. WHEN INSTALLING THIS UNIT, LOCAL, STATE, OR FEDERAL CODES SHOULD BE ADHERED TO.
5. SLOTTED HOLES IN MODEL 6800 ARE FOR TOOL CLEARANCE TO INSTALL MODEL 6810W DRAIN BYPASS INSERT (SEE SHEET 3).
6. INSTALLATION SEQUENCE:
 - A. USE HAWS MODEL 6800/6810 FULLY ASSEMBLED TO MOUNTING PLATE AS A TEMPLATE IF DRILLING CONCRETE FOR ANCHORS.
 - B. FASTEN MODEL 6800 TO CONCRETE ANCHORS WITH THE SLOTTED HOLES FACING TOWARDS THE PLUMBING FIXTURE. FOLLOW THE ANCHOR MANUFACTURER'S INSTRUCTIONS FOR PROPER TORQUE.
 - C. INSTALL THE APPROPRIATE MOUNTING PLATE FOR YOUR PLUMBING FIXTURE (PURCHASED SEPARATELY) WITH THE SUPPLIED 3/8" U-BOLTS. REFER TO THE INSTALLATION DRAWINGS INCLUDED WITH THE MOUNTING PLATE FOR DETAILED INSTRUCTIONS FOR YOUR PLUMBING FIXTURE.

(NOTES FOR MODELS 6810 & 6810W ON SHEET 3)

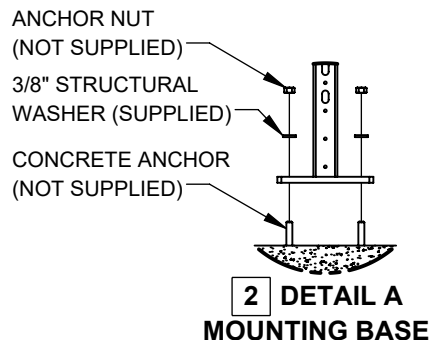

ATTENTION

THIS IN-WALL CARRIER IS USED WITH SEVERAL DIFFERENT MODELS. FOR FOUNTAIN ROUGH-IN HEIGHTS AND MOUNTING PLATE ORIENTATION SEE THE MOST CURRENT INSTALLATION INSTRUCTIONS SUPPLIED WITH THE FOUNTAIN AND MOUNTING PLATE BEING USED PRIOR TO INSTALLING THIS UNIT.

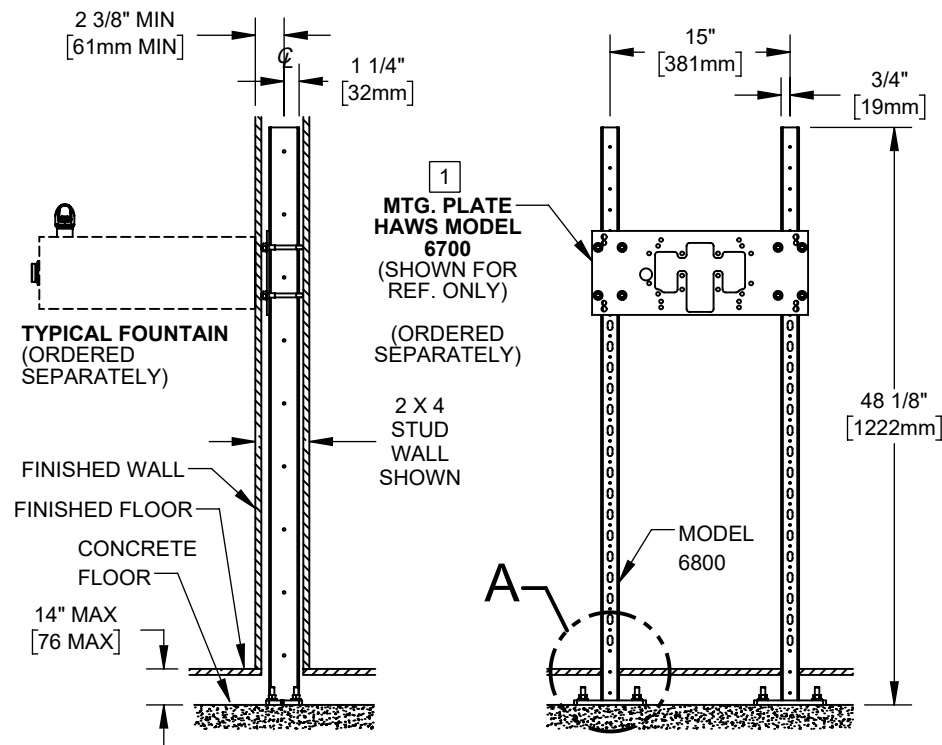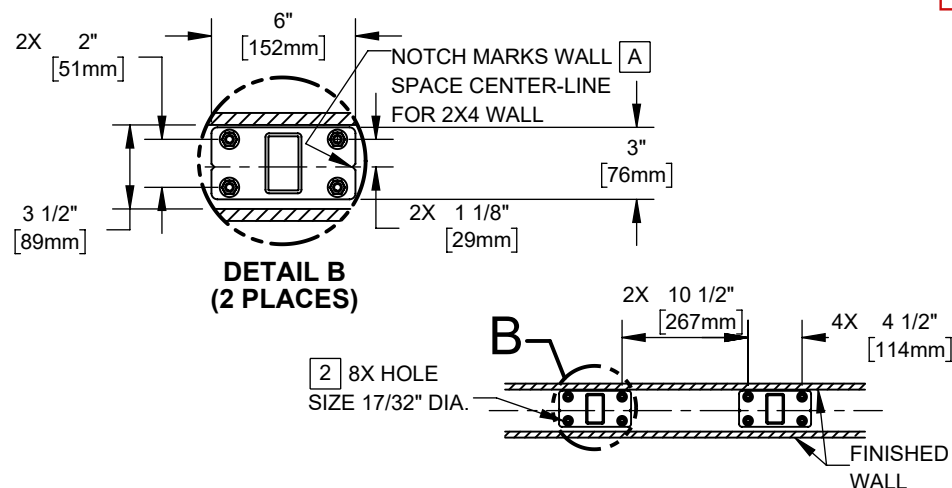



FOR MODELS: 1001, 1025, 1047, 1075, 1105, 1107L, AND 1109
SEE PAGES 2&3 FOR OTHER MODELS



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN: 5877	REV. ECN: 5877	BY: JU	MODEL(S): 6800, 6810, & 6810W	PART NUMBER: 0002080019
DRAWN: JU	DATE: 01/09/23	CHKD: JU	UNIVERSAL IN WALL CARRIER SUPPORT	REVISION: 1
APPROVED: DHP	DATE: 02/06/23	SCALE: 1:16	DRAWING TYPE: INSTALLATION	SHEET 1 OF 3

THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

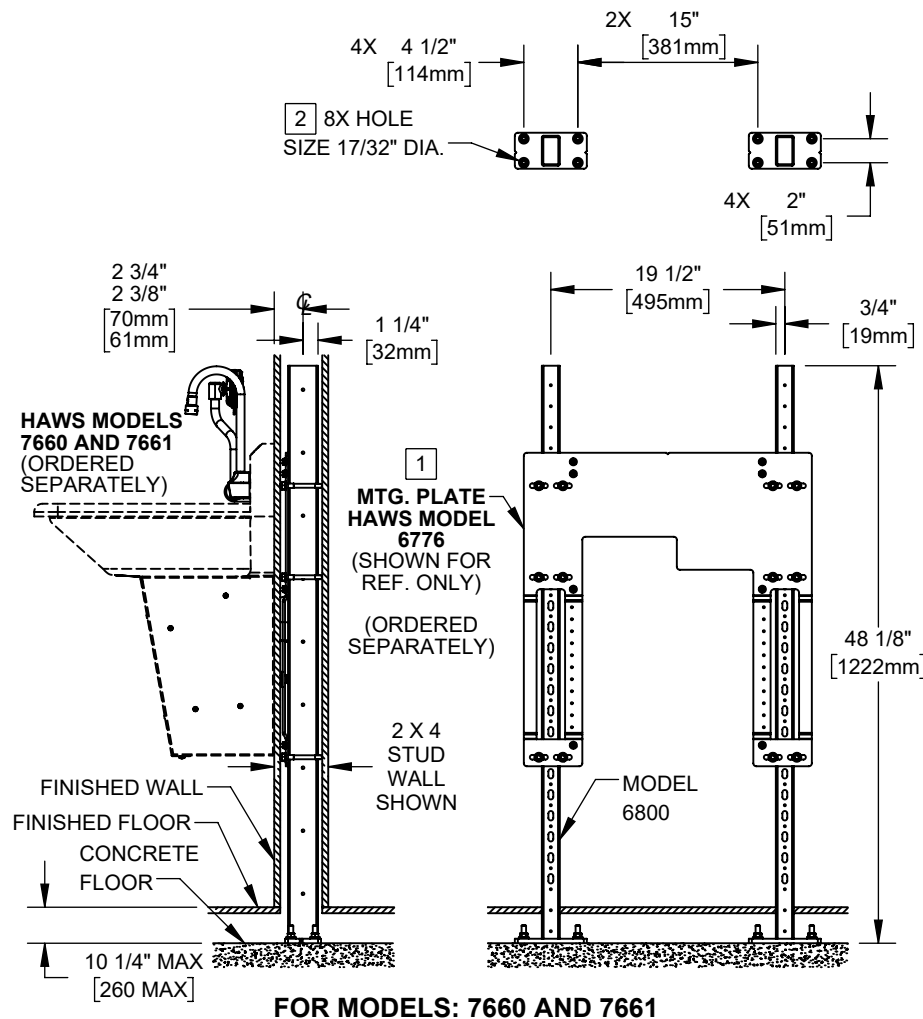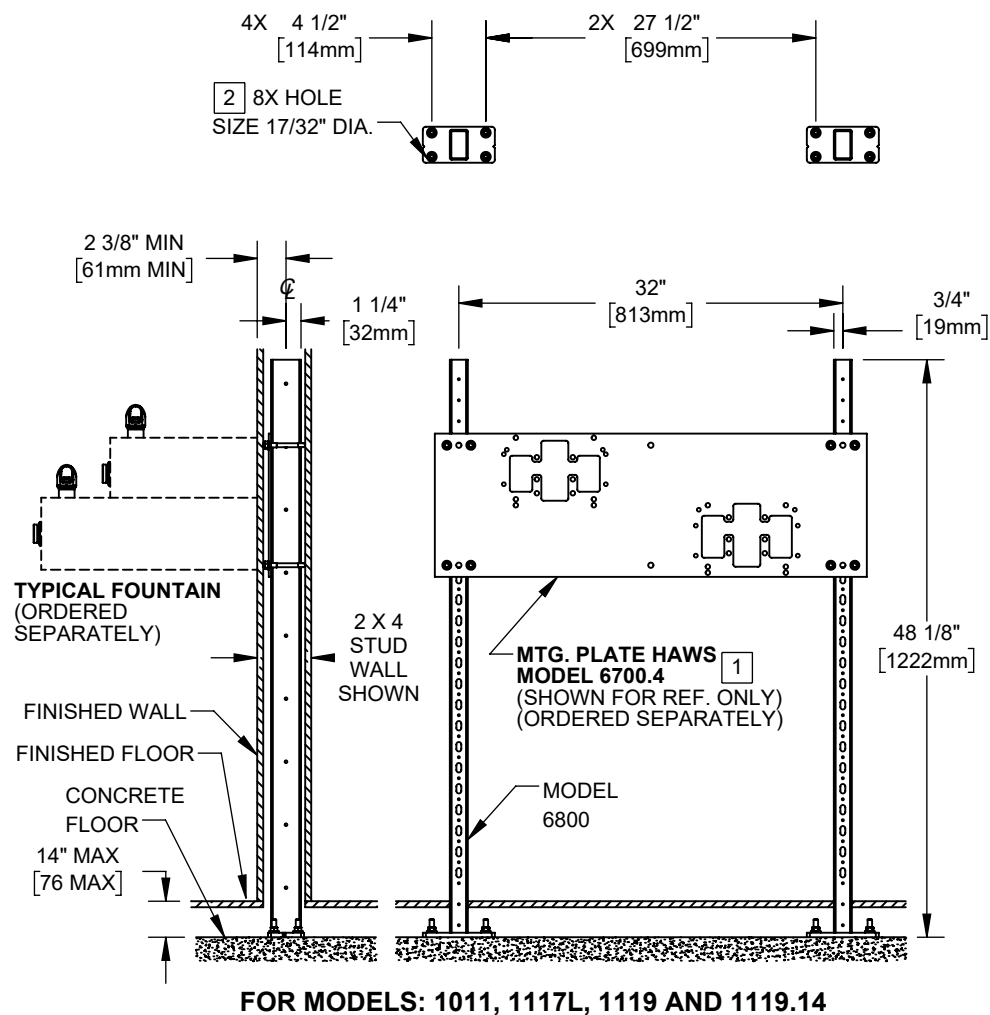


1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWSO.COM
WEBSITE: WWW.HAWSO.COM

ECN: 5877	REV. ECN: 5877	BY: JU	MODEL(S)	PART NUMBER
DRAWN: JU	DATE: 01/09/23	CHKD: JU	6800, 6810, & 6810W	0002080019
APPROVED: DHP	DATE: 02/06/23	SCALE: 1:16	UNIVERSAL IN WALL CARRIER SUPPORT	REVISION
		DRAWING TYPE: INSTALLATION	SIZE: A	1
				SHEET 2 OF 3

THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.



(NOTES FOR MODELS 6810 & 6810W)

7. HAWS MODEL 6810W, DRAIN BYPASS INSERT, IS USED TO ALLOW LATERAL DRAIN INSTALLATION IN NARROW WALL CAVITIES SUCH AS 2X4 WALLS.
8. CUT MODEL 6800, IN-WALL CARRIER, ROUGHLY $2 \frac{11}{16}$ " BELOW DESIRED NOMINAL DRAIN ELEVATION THROUGH THE CENTER OF THE CLOSEST .170" DIA. HOLE $\pm 1/8$ ".
9. CUT MODEL 6800, IN-WALL CARRIER, SQUARE $\pm 3^\circ$.
10. TORQUE 5/8" SET SCREWS TO 12 LB-FT USING THE SUPPLIED 5/16" HEX BIT. USE A STRAIGHT EDGE WHILE TIGHTENING SET SCREWS TO ENSURE THE VERTICAL SUPPORT IS STRAIGHT.
11. DRAIN BYPASS INSERT CAN BE INSTALLED IN RIGHT, LEFT, OR BOTH VERTICAL SUPPORTS OF MODEL 6800.

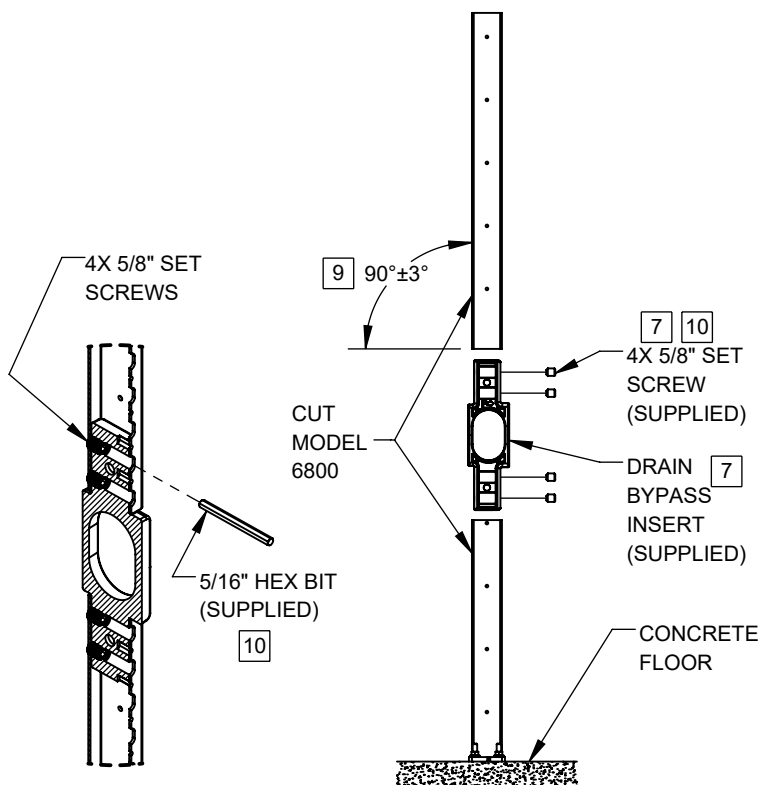


SECTION VIEW OF
INSTALLED 6810W
DRAIN BYPASS INSERT

**HAWS MODEL 6810: MODEL 6800 WITH
MODEL 6810W DRAIN BYPASS INSERT**

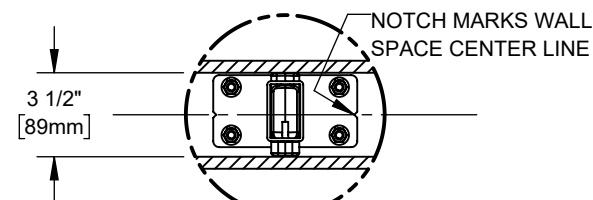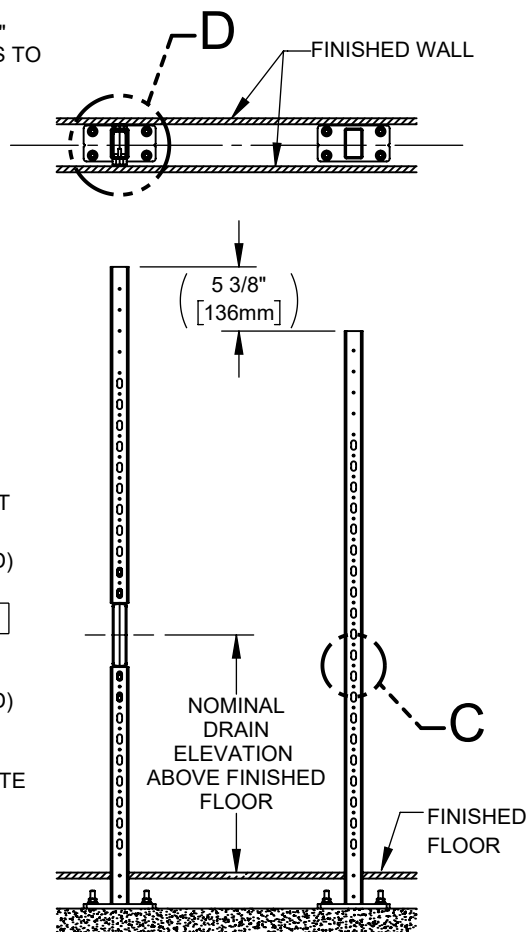


DETAIL D

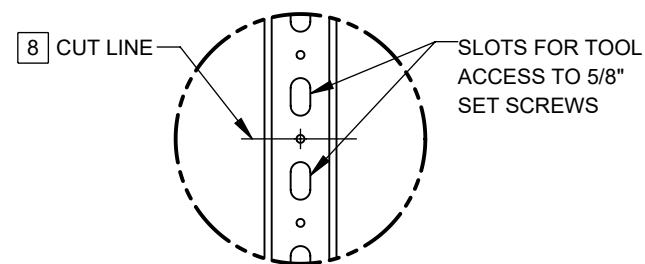

DETAIL C

ARROW INDICATES
DIRECTION TOWARDS
FIXTURE

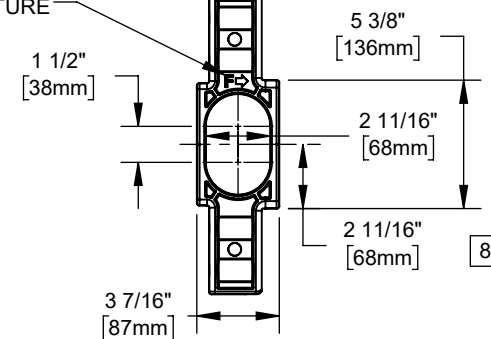

DRAIN BYPASS INSERT



1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM

ECN: 5877	REV. ECN: 5877	BY: JU	MODEL(S) 6800, 6810, & 6810W UNIVERSAL IN WALL CARRIER SUPPORT	PART NUMBER 0002080019
DRAWN: JU	DATE: 01/09/23	CHKD: JU		REVISION 1
APPROVED: DHP	DATE: 02/06/23	SCALE: 1:16	DRAWING TYPE: INSTALLATION	SIZE: A
				SHEET 3 OF 3

FEATURES & BENEFITS


MOUNTING

Heavy duty 3/16" (.47 cm) steel pre-drilled and threaded in-wall mounting plate along with all-thread studs and hardware.

OPTIONS

- Support Frame: Model 6800 In-wall floor mounted fixture support legs, welded steel 4-bolt floor flanges, and supplied with 'U' bolts and hardware.

For more information, visit www.hawscos.com or call (888) 640-4297.


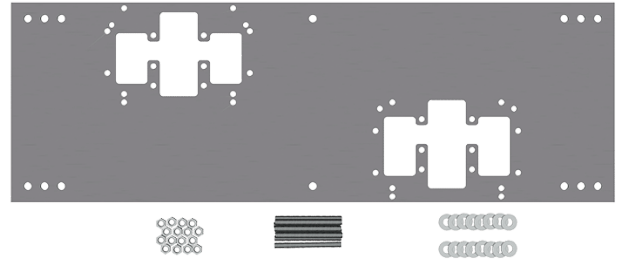


SPECIFICATIONS

Model 6700.4 'Hi-Lo' in-wall 3/16" thick steel pre-drilled mounting plate is larger, thicker and stronger than any other plate in the industry, and shall include the all-thread studs, nuts, and washers. For use with many Haws dual bubbler fountains.

APPLICATIONS


Haws produces mounting plates and frames to assist in the installation process as well as to provide solid bases for the wall mounted designed fountains. Mounting plates and frames meet the requirements solely for the specified applicable fountains and are not designed to be used in the installation of any unspecified fountain.

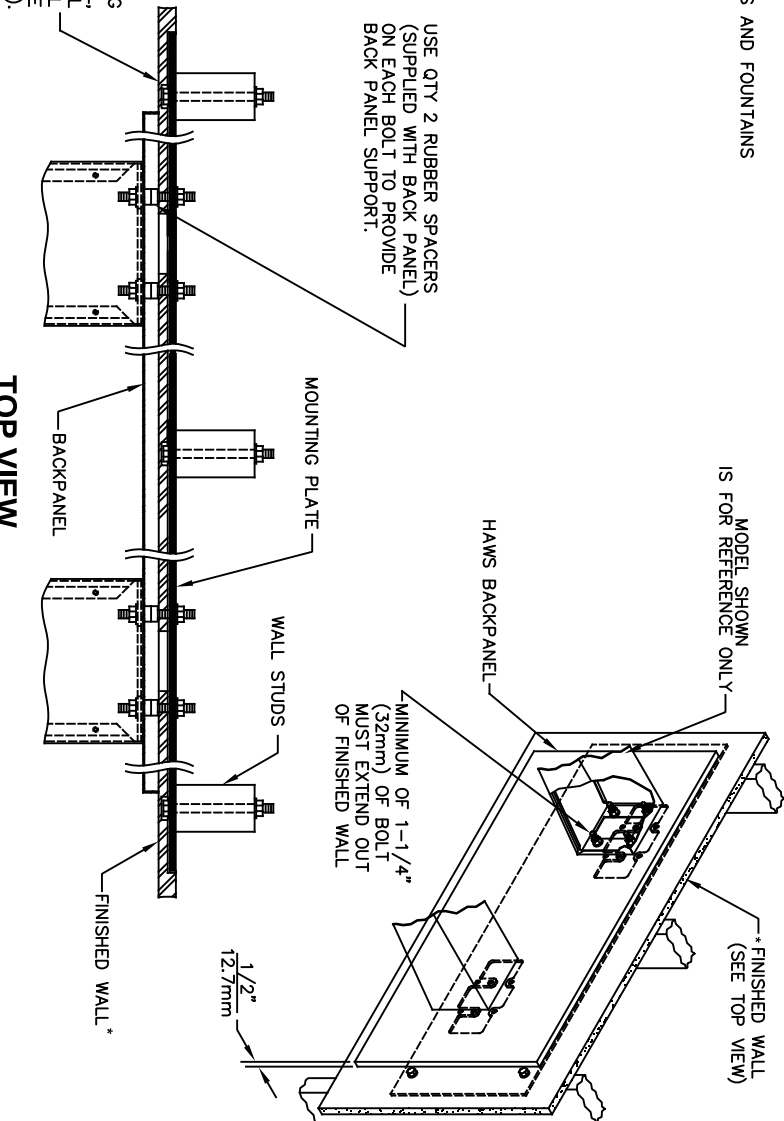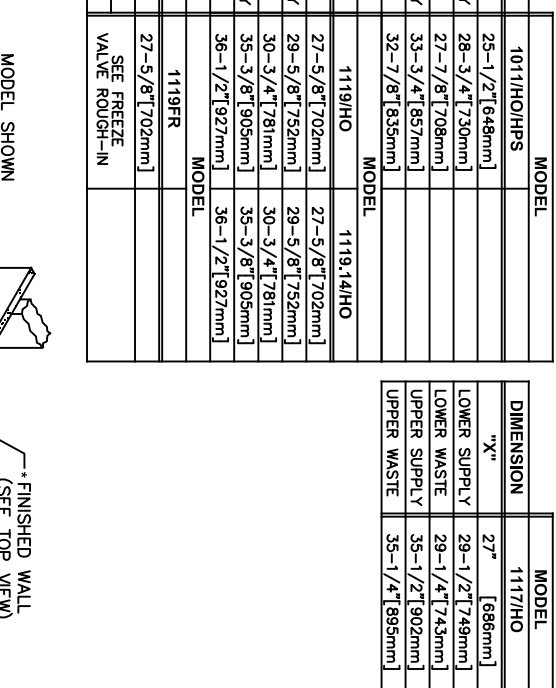

REGARDING CONCRETE/MASONRY WALL MOUNTING: DO NOT SECURE MOUNTING PLATE TO SAME SIDE OF WALL AS FOUNTAIN. AVOID COMPROMISING INTEGRITY OF WALL WHEN ANCHORING FOUNTAIN. IT IS RECOMMENDED THAT INSTALLER CALL TECHNICAL SUPPORT IF THERE ARE ANY QUESTIONS AS TO HOW TO OBTAIN A PROPER ANCHOR IN CONCRETE/MASONRY WALLS. 1-800-766-5612

DIMENSION		MODEL	
"X"	25-1/2" [649mm]	10111/HO/HPs	
LOWER SUPPLY	28-3/4" [730mm]		
LOWER WASTE	27-7/8" [708mm]		
UPPER SUPPLY	33-3/4" [857mm]		
UPPER WASTE	32-7/8" [835mm]		
DIMENSION		MODEL	
"X"	27-5/8" [702mm]	1119/HO	1119,14/HO
LOWER SUPPLY	29-5/8" [752mm]		
LOWER WASTE	30-3/4" [781mm]		
UPPER SUPPLY	35-3/8" [905mm]		
UPPER WASTE	36-1/2" [927mm]		
DIMENSION		MODEL	
"X"	27-5/8" [702mm]	1119FR	
SUPPLY	SEE FREEZE VALVE ROUGH-IN		
WASTE			

DIMENSION		MODEL	
"X"	27" [686mm]	1117/HO	
LOWER SUPPLY	29-1/2" [749mm]		
LOWER WASTE	29-1/4" [743mm]		
UPPER SUPPLY	35-1/2" [902mm]		
UPPER WASTE	35-1/4" [895mm]		

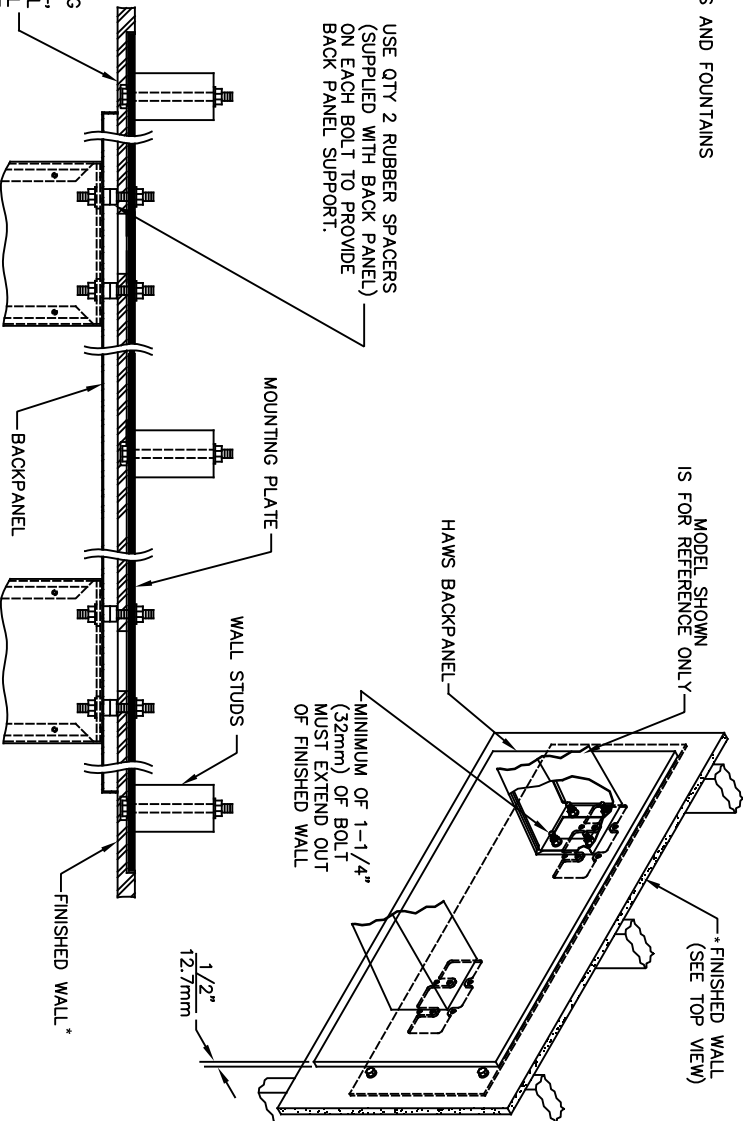

1455 KLEPPE LANE
SPARKS, NEVADA 89431
(775) 359-4712 FAX (775) 359-7424
E-MAIL: HAWS@HAWS.CO.COM
WEBSITE: WWW.HAWS.CO.COM



model BP32

Back Panel

FEATURES & BENEFITS

OPTIONS

For more information, visit www.hawesco.com or call (888) 640-4297.




SPECIFICATIONS


Model BP32 is a versatile and decorative back panel for model 1920 bottle filler that increases location visibility, and also helps protect wall from inadvertent splash. This back panel is 32" x 9.5" (81 x 24 cm) stainless steel with a satin finish. BP32 can be used with model 1920 over 1011, 1117 and 1119 series dual fountains.

APPLICATIONS



THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

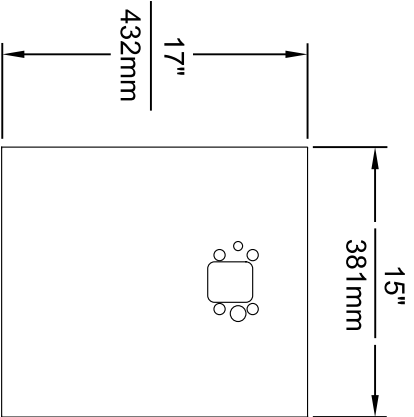


MODEL BP15 / BP15HPS / BP15W

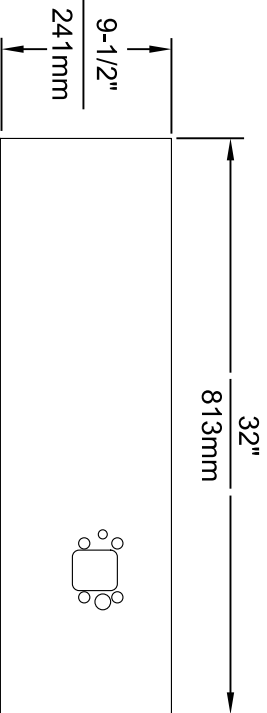


MODEL BP32 / BP32HPS / BP32W

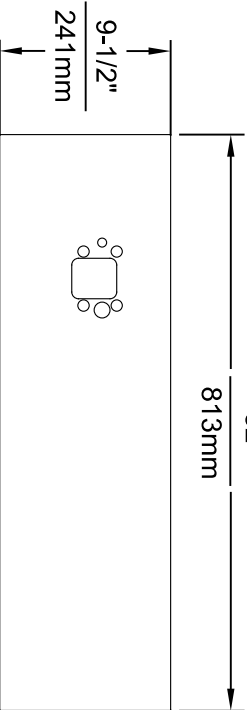

MODEL BP32R / BP32RW



- NOTES:
1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO.
 2. BOTTLE FILLER SHOWN FOR REFERENCE ONLY (NOT SUPPLIED).

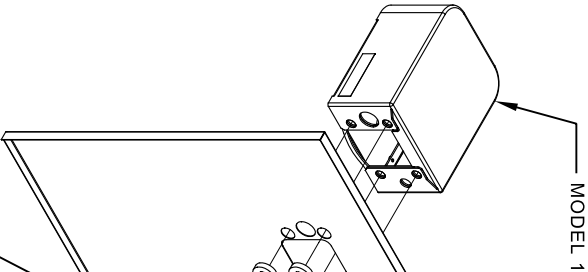

8 SPACERS (2 PER MOUNTING BOLT IF THE MOUNTING PLATE (MODEL 6700 - NOT SUPPLIED) IS INSTALLED BEHIND THE FINISHED WALL. USE 1 SPACER PER BOLT FOR RETROFITS WHERE THE MOUNTING PLATE (MODEL 6700R - NOT SUPPLIED) IS INSTALLED IN FRONT OF THE FINISHED WALL)

INSTALLATION OVER :

SHOWN FROM
(SEE SHEET 3 OF 3 FOR INSTAL ON COMBINATION BOTTLE F BACK PANELS FOR CHILD HE MODELS BP15C & BP32


ECON. NO. REVISED PERBY:				MODEL(S)			
5061	ECON. 5972	FV		DRAWING, BACK PANEL, FOR BP15 SERIES & BP32			
DRAWN:	DATE:	CHKD:	JC	SCALE: 1"1			
ML	06/27/16			DRAWING TYPE:			
APPROVED:							
FV	DATE:						
	04/15/24						



THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.


STEP 1

ATTACH SUPPLIED BRACKET TO WALL USING APPROPRIATE FASTENERS. BRACKET IS INSTALLED OVER THE HIGH-SIDE OF THE DRINKING FOUNTAIN

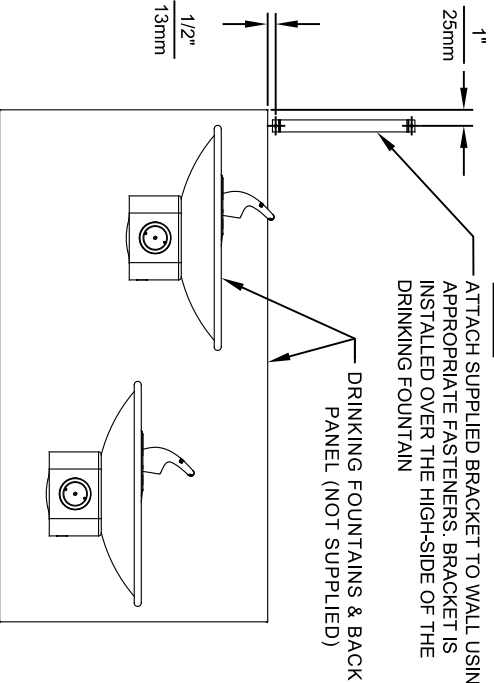

STEP 2

PLACE THE BACKPLATE AGAINST THE WALL AND SLIDE SIDWAYS SO THE TABS CATCH UNDER THE BRACKET.

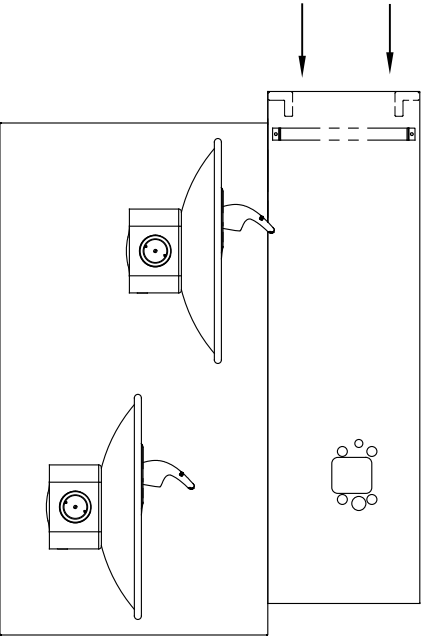


STEP 3


INSTALL THE BOTTLE FILLER (NOT SUPPLIED) PER THE INSTRUCTIONS SUPPLIED WITH THE UNIT.

NOTES:

1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO.
2. BOTTLE FILLERS, DRINKING FOUNTAINS & DRINKING FOUNTAIN BACK PANELS SHOWN FOR REFERENCE ONLY (NOT SUPPLIED).

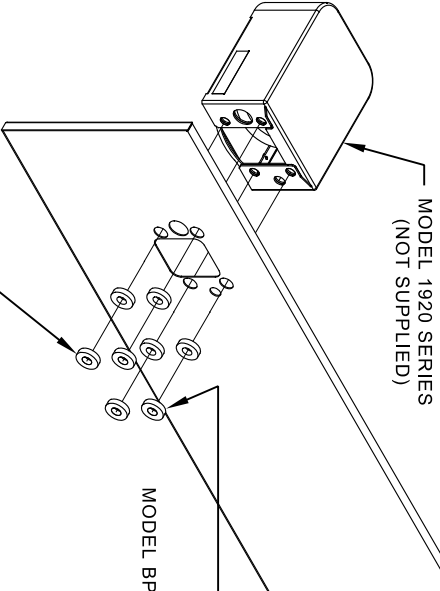

8 SPACERS (2 PER _____)
MOUNTING BOLT IF THE MOUNTING PLATE (MODEL 6700 - NOT SUPPLIED) IS INSTALLED BEHIND THE FINISHED WALL. USE 1 SPACER PER BOLT FOR RETROFITS WHERE THE MOUNTING PLATE (MODEL 6700R - NOT SUPPLIED) IS INSTALLED IN FRONT OF THE FINISHED WALL

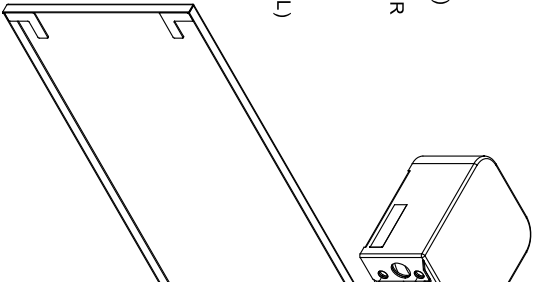


INSTALLATION OVER DOUBLE PANEL

SHOWN FROM REAR

ECON. NO. REVISED PER BY:		MODEL(S)	
5061	ECON: 5972	FV	DRAWING, BACK PANEL, FOR BP15 SERIES & BP32
DRAWN:		CHKD:	
ML	DATE: 02/02/17	JC	
APPROVED:		DATE:	
FV	DATE: 04/15/24	SCALE: 1"	DRAWING TYPE:




THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS
MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

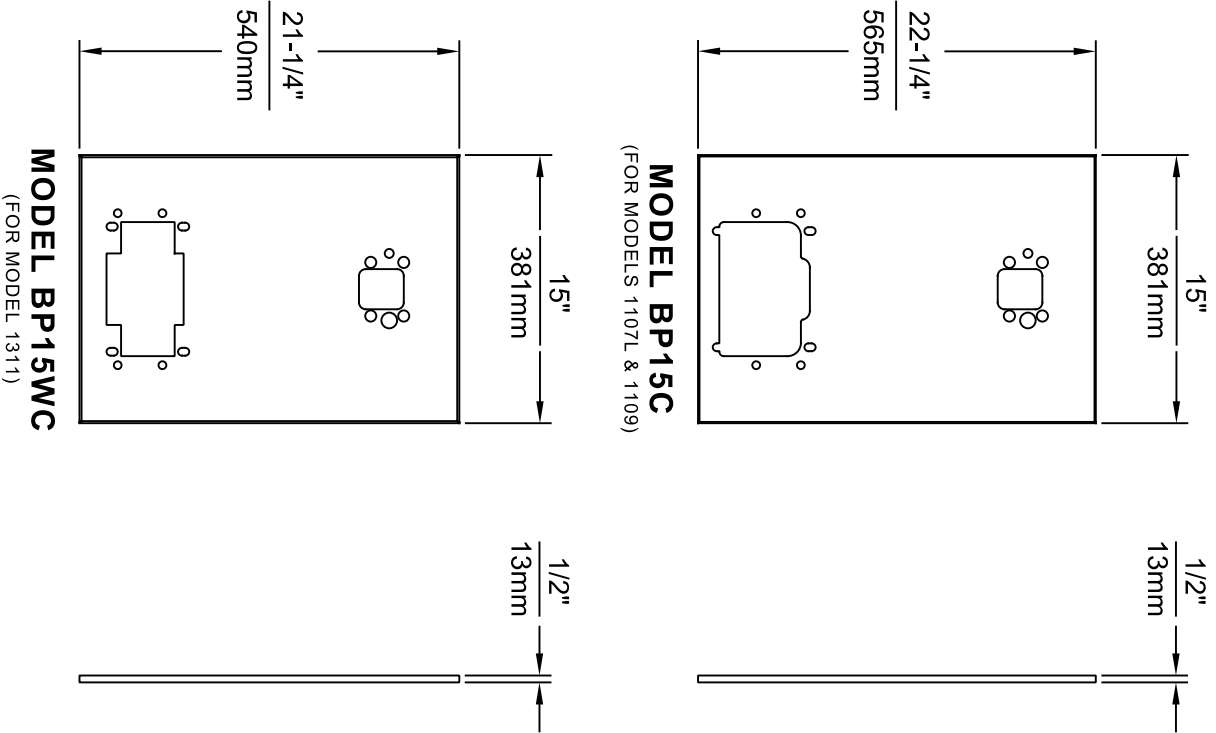

NOTES:
1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL
CODES SHOULD BE ADHERED TO.

2. BOTTLE FILLER AND DRINKING FOUNTAIN SHOWN FOR
REFERENCE ONLY (NOT SUPPLIED).

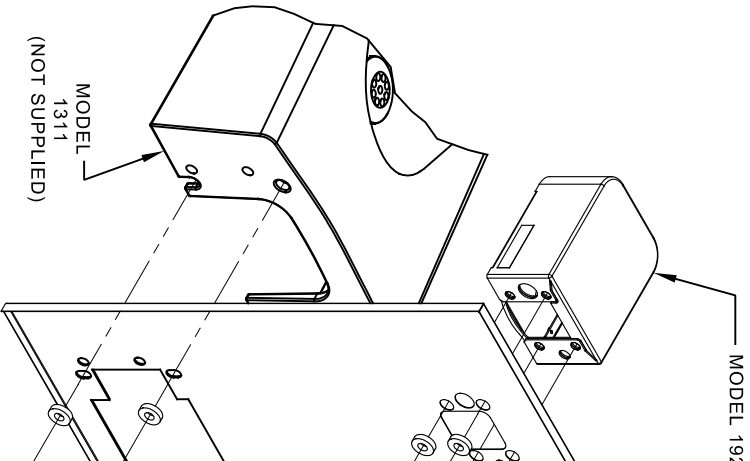

16 SPACERS (2 PER MOUNTING BO
BOTH MOUNTING PLATES (MODEL
NOT SUPPLIED) ARE INSTALLED BE
THE FINISHED WALL. USE 1 SPACE
PER BOLT FOR RETROFITS WHERE
BOTH MOUNTING PLATES (MODEL
NOT SUPPLIED) ARE INSTALLED I
FRONT OF THE FINISHED WALL)

ONE PIECE INSTALLATION ON S

SHOWN FROM REAR

(MODEL BP15C & BP15WC ARE COMBIN
FILLER AND FOUNTAIN BACK PANELS U
HEIGHT APPLICATIONS ONLY ON MODELS
- BOTTLE FILLER & DRINKING FOUNTAIN

ECON. REVISED PERBY:		MODEL(S)	
9972	ECON. 9972	FV	
DRAWN:	DATE:	CHKD:	
FV	12/19/23	JC	
APPROVED:		DATE:	
FV		04/19/24	
SCALE:		1:1	DRAWING TYPE:



Stops & Supplies

45-LKABCP

**CHICAGO
FAUCETS®**
Geberit Group

Product Type

Straight stop

Features & Specifications

- Compression valve
- Loose key handle
- Vandal Proof 2-1/4" Tee handle
- Slow compression operating cartridge, left-hand
- ECAST® design provides durable cast brass construction with total lead content equal to or less than 0.25% by weighted average
- Complies with the requirements of the Buy American Act of 1933.
- CFNow! Item Ships in 3 Days

Performance Specification

- Rated Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140°F

Warranty

- 5-Year Limited Cartridge Warranty
- Lifetime Limited Faucet Warranty
- 1-Year Limited Finish Warranty

Codes & Standards

-  ASME A112.18.1/CSA B125.1
-  NSF/ANSI/CAN 372 Low Lead Content
-  NSF/ANSI/CAN 61: Q ≤ 0.5

Job Name _____

Item Number _____

Section/Tag _____

Model Specified _____

Architect _____

Engineer _____

Contractor _____

☐ Submitted as Shown

☐ Submitted with Variations

Date _____



ECAST


ECAST products are intended for installation where state laws and local codes mandate lead content levels or in any location where lead content is a concern.



2100 South Clearwater Drive
Des Plaines, IL
P: 847/803-5000
F: 847/803-5454
Technical: 800/TEC-TRUE
www.chicagofaucets.com

Architect/Engineer Specification

Chicago Faucets No. 45-LKABCP, Straight Stop Fitting, chrome plated. 2-1/4" metal tee handle with square, tapered broach. Slow compression rebuildable cartridge, opens and closes 360° for fine adjustment, closes with water pressure, features square, tapered stem. 1/2" NPT female thread inlet. 1/2" NPT female thread outlet. ECAST® construction with less than 0.25% lead content by weighted average. This product is tested and certified to industry standards: ASME A112.18.1/CSA B125.1, Certified to NSF/ANSI 61, Section 9, California Health and Safety Code 116875 (AB1953-2006), Vermont Bill S.152, and NSF/ANSI 372 Low Lead Content.

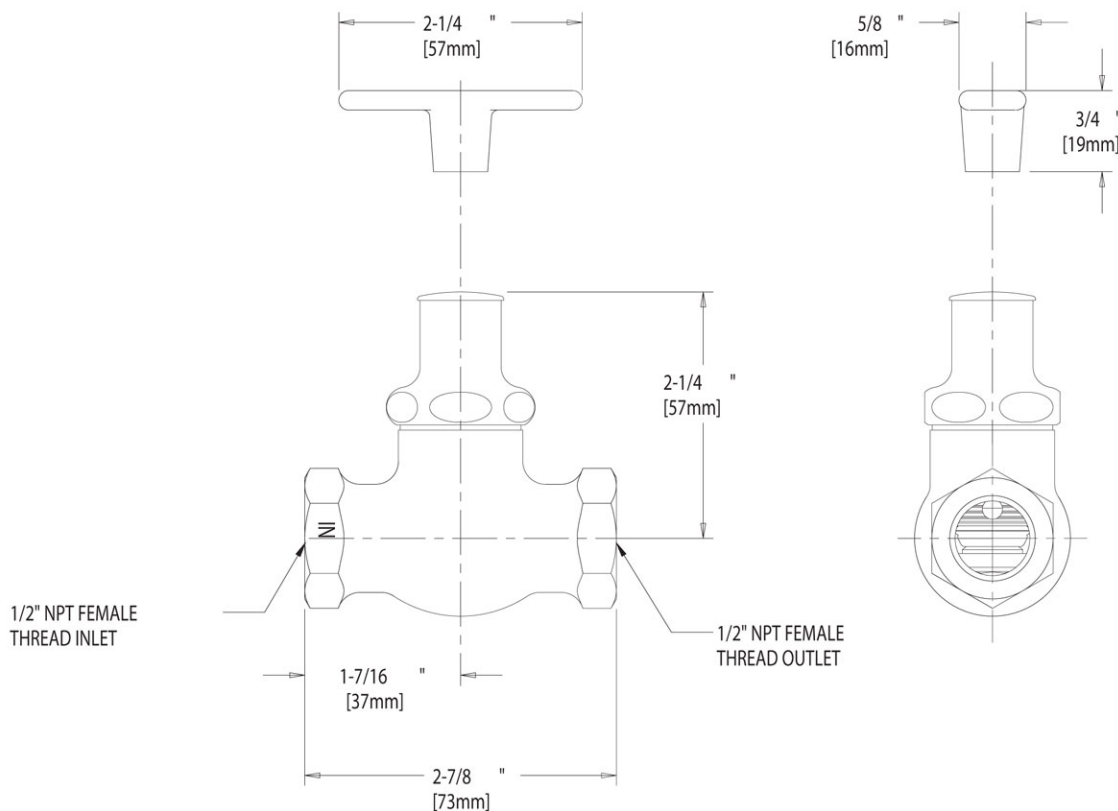

Operation and Maintenance

Installation should be in accordance with local plumbing codes. Flush all pipes thoroughly before installation. After installation, remove spout outlet or flow control and flush faucet thoroughly to clear any debris. Care should be taken when cleaning the product. Do not use abrasive cleaners, chemicals or solvents as they can result in surface damage. Use mild soap and warm water for cleaning and protecting the life of Chicago Faucet products. For specific operation and maintenance refer to the installation instructions and repair parts documents that are located at www.chicagofaucets.com.

Chicago Faucets, member of the Geberit Group, is the leading brand of commercial faucets and fittings in the United States, offering a complete range of products for schools, laboratories, hospitals, office buildings, food service, airports and sport facilities. Call 1.800.TECTRUE or 1.847.803.5000 Option 1 for installation or other technical assistance.





model 6469

Strainer, 1920 Drip Tray

FEATURES & BENEFITS

CONSTRUCTION

Type 304 stainless steel for durability, aesthetic integration, and vandal resistance geometry.

DESIGN

Angled drip tray to prevent water build up or freezing. Two piece unit with removable upper portion to allow for easy cleaning.

RETROFITABLE

Can be retrofitted over new or existing Haws 1109/1119 drinking fountains, along with similar competitors products.

MOUNTING

Various mounting options allow for easy installation with pre-drilled holes.

SAFETY

Captures and diverts water directly into drinking fountain bowl to prevent splashing or slipping hazards.



OPTIONS

For more information, visit www.hawsco.com or call (888) 640-4297.

SPECIFICATIONS


The Haws 6469 drip tray is used as a retrofit accessory for the Haws 1920 bottle filler when mounting it over the Haws 1109 style of drinking fountains. Easy mounting instructions allow this tray to quickly convert the 1109 series to a bottle filling station. Made of 304 stainless steel, the upper portion can be easily removed, allowing the unit to be cleaned.

APPLICATIONS


Model 6469 is designed to retrofit over Haws 1109/1119 drinking fountains that are already installed in the field to convert to a bottle filling station with the addition of the the 1920 bottle filler, or for new installations in public or private indoor/outdoor settings where drinking fountain and bottle filling stations are desired.

6469 STRAINER DRIP TRAY INSTALLATION


- 1 THE 6469 STRAINER DRIP TRAY ALLOWS THE INSTALLATION OF THE 1920 SERIES BOTTLE FILLER OVER HAWS 1109/1119 SERIES MODEL DRINKING FOUNTAINS. CENTER THE LOWER DRAIN PAN ALONG THE CENTERLINE OF THE FOUNTAIN.
- 2 EXTEND THE FRONT EDGE OF THE LOWER DRAIN PAN OVER THE EDGE OF THE FOUNTAIN BOWL BY APPROXIMATELY 1/4" (6mm). IT IS RECOMMENDED TO TEMPORARILY TAPE THE DRAIN PAN IN PLACE, INSTALL THE TOP COVER, AND ACTIVATE THE BOTTLE FILLER TO VERIFY THE WATER STREAM IS ALIGNED TO THE INLET HOLE. VERIFY THE LIP OF THE TOP COVER HANGS OVER THE EDGE OF THE FOUNTAIN BOWL.
- 3 MARK THE DRAIN PAN HOLE LOCATIONS ON THE FOUNTAIN. THE DRAIN PAN CAN NOW BE PERMANENTLY INSTALLED USING AN APPROPRIATE FASTENING METHOD (FASTENERS NOT SUPPLIED). FASTENING OPTIONS INCLUDE THRU BOLTS, RIVETS, TACK WELDS, AND DOUBLE-SIDED FOAM TAPE. INSTALL THE TOP COVER AND SECURE TO THE DRAIN PAN WITH THE SUPPLIED 4-40 FLAT HEAD SCREWS (QTY. 2).

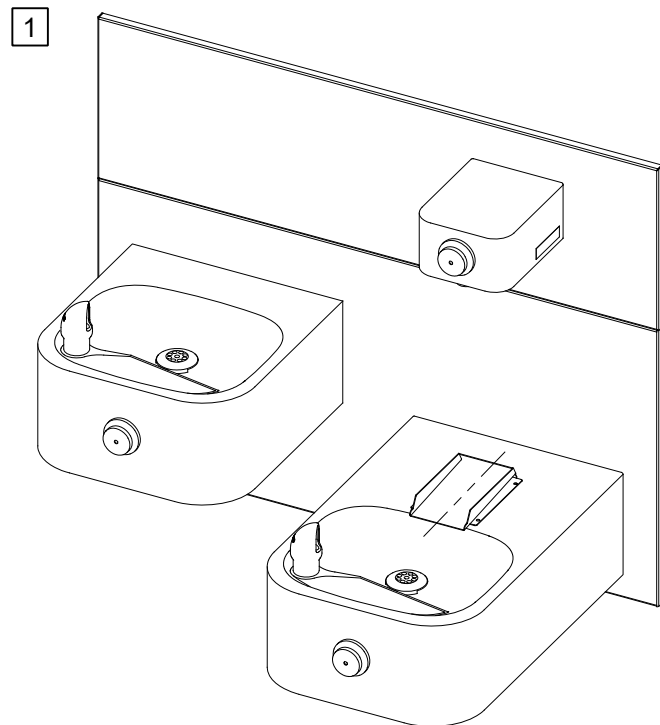

3

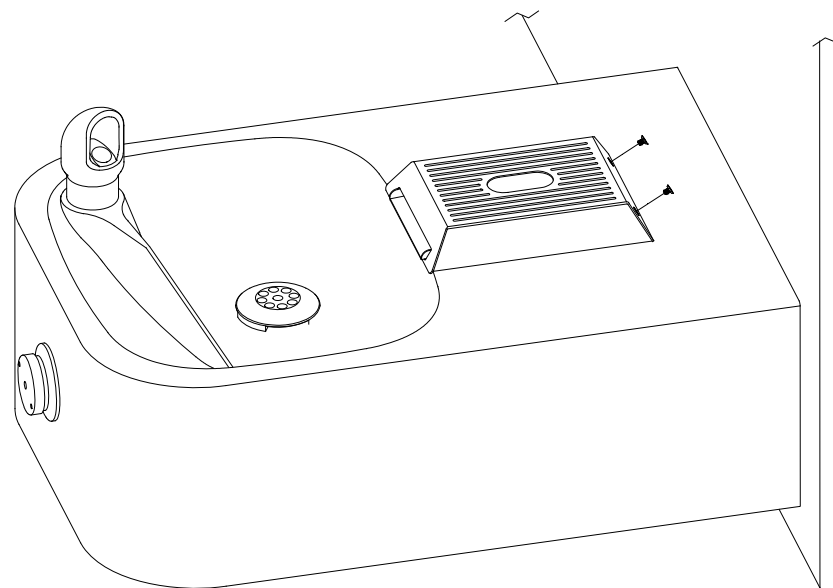

2

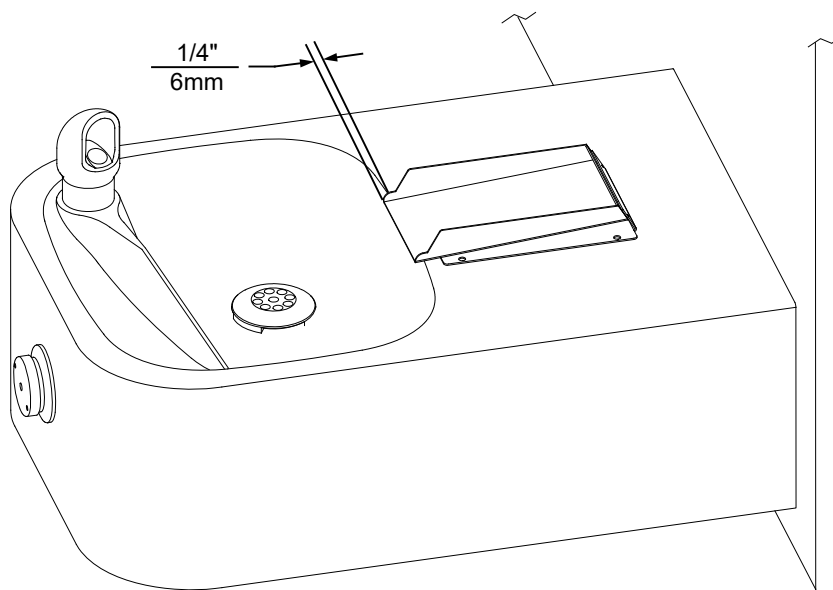

 Haws®				1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM			
				MODEL(S) 6469			
ECN NO. 5150	REVISED PER ECN: 5799	BY: FV	DATE: 01/10/17		CHKD.: JS		PART NUMBER 0510000657.D
DRAWN: MJ	DATE: 01/10/17	CHKD.: JS					REVISION 2
APPROVED: FV	DATE: 07/08/22	SCALE: 1:4	DRAWING TYPE: INSTALLATION	SIZE: A	SHEET 1 OF 1		